

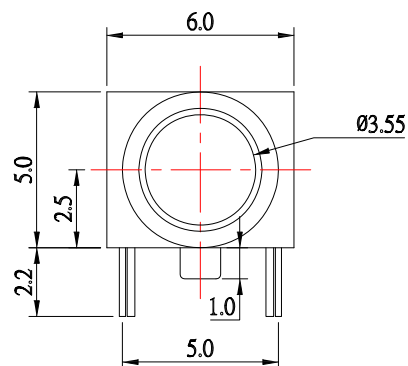
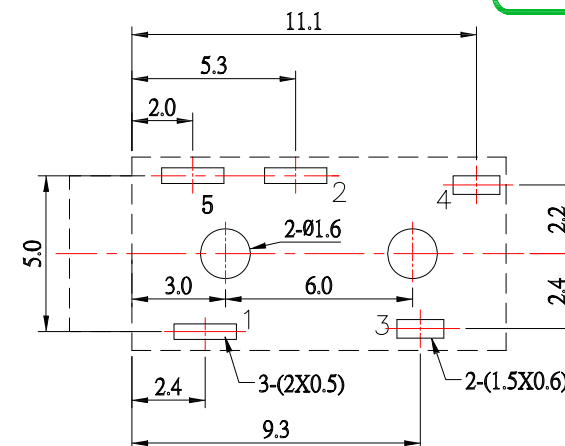
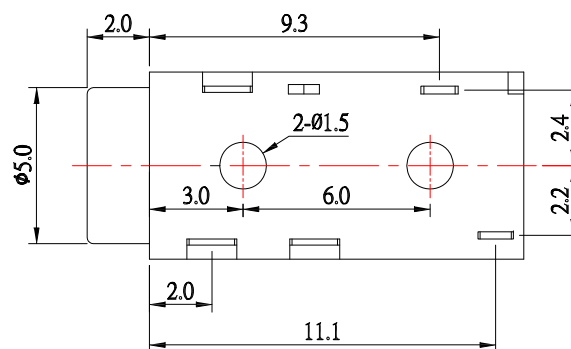


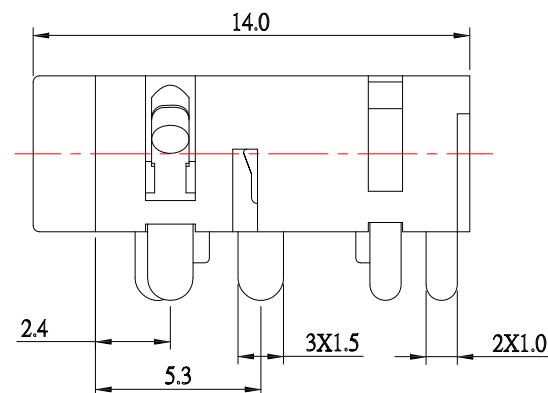

SCHEMATIC

PJ-D3027D	PJ-D3027D-1	PJ-D3027D-2

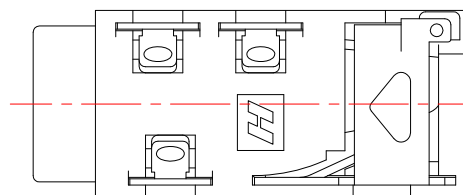

P.C.B LAYOUT
TOP VIEW

SPECIFICATIONS

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 07/23/13
DATE: 07/23/13
DATE: 07/23/13

MAT'L	FINISH	SCALE	SHEET NO.	TITLE	JACK	MODLE	DWG NO.	PART NO.	SIZE	VER
		1 : 1	1 of 1	PHONE JACK			PJ-D3027D-S125	PJ-D3027D-S125	A4	R1