


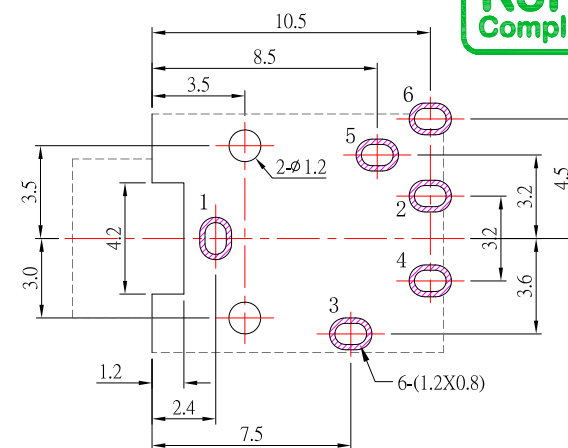
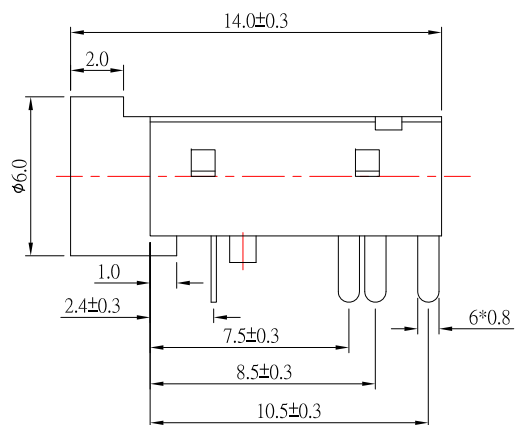


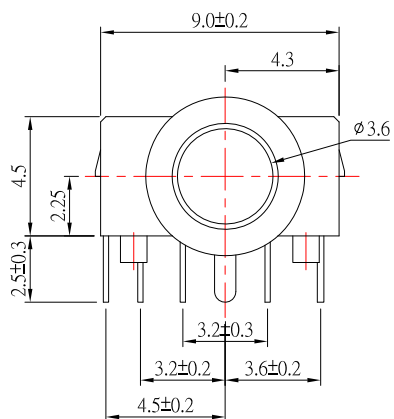

P.C.B LAYOUT
TOP VIEW

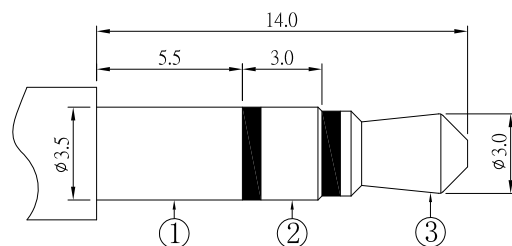


ø3.50mm 3 POLE PLUG

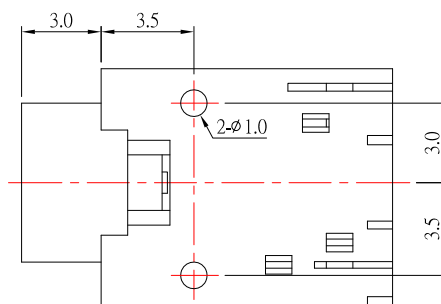

SCHEMATIC

PJ-D3053-S124



7	HOUSING	1	PBT	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
4	CURVE PIECE	1	PHOSPHOR BRONZE	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	04/25/24					
CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK 常閉型 / 無外殼	
Jacky Chen	04/25/24					
		SCALE	1 : 1	DWG NO.	PJ-D3053-S124	SIZE
APPROVED BY:	DATE					A4
Tony Kao	04/25/24	SHEET NO.	1 of 1	PART NO.	PJ-D3053-S124	VER
						R2

7			
2	更新圖面	Jack	042524
1	更新外型樣式	Jack	100719
ITEM NO	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3

3RD.
ANGEL "



UNITS

MM