

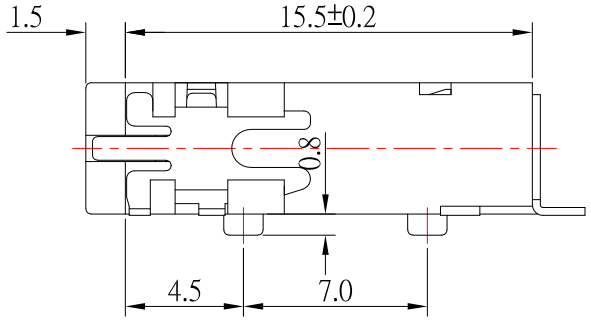

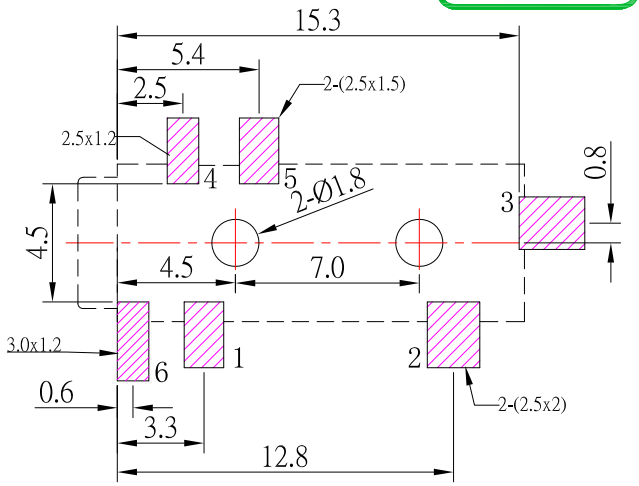

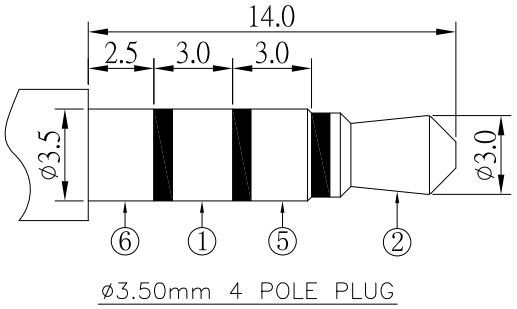

ø3.50mm 4 POLE PLUG

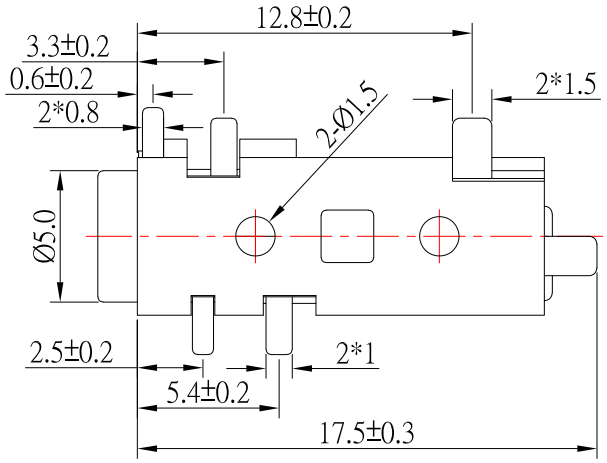

P.C.B LAYOUT (TOP VIEW)

SPECIFICATION

1.Rating ：DC 30V 1.0A；

2.Contact resistance：≤30mΩ；

3.Insulation resistance：≥100MΩ；

4.Withstand voltage：500VAC ；

5.Insertion and extraction force：3-20N;

6.life test：5,000 cycles。

SCHEMATIC

PJ-3756	PJ-3755	PJ-3755A	PJ-3754
			

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	5# CONTACT FOOT	1	SUS	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	BRASS	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	SUS	Ag-Plating

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新尺寸	Jack	101626
3	更新材質	Jack	102824
2	更新尺寸	Jack	050719
1	更新為A0版	Jack	030217

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3'

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 10/16/26	MAT'L	
CHECKED BY: Jacky Chen	DATE 10/16/26	FINISH	
APPROVED BY: Tony Kao	DATE 10/16/26	SCALE	1 : 1
		SHEET NO.	1 of 1

TITLE	JACK		
MODLE	PHONE JACK		
DWG NO.	PJ-375x-S124	SIZE	A4
PART NO.	PJ-375x-S124	VER	R5