
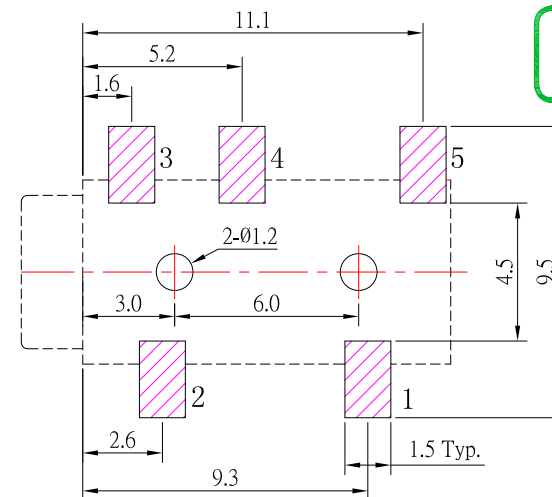
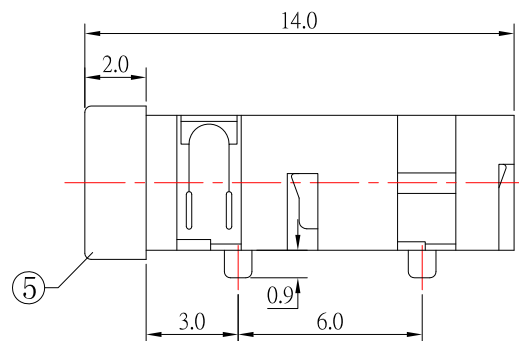


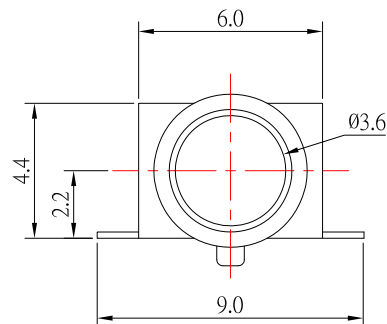

P.C.B LAYOUT

SPECIFICATION

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

SCHEMATIC

PJ-3865D-S125	PJ-3863D-S125	PJ-3863AD-S125	PJ-3864D-S125	PJ-3864AD-S125

6	HOUSING	1	PA9T	
5	CURVE PIECE	1	BRASS	Au-Plating
4	CONTACT FOOT	1	SUS301	Au-Plating
3	CONTACT FOOT	1	SUS301	Au-Plating
2	CONTACT FOOT	1	SUS301	Au-Plating
1	SPRING PIECE	1	BE-CU	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	更新為A0版	Jack	080514	建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S UNITS MM				
3	更新尺寸8.7改9.0	Jack	080114					
2	更新SPEC及材質	Jack	060914					
1	更新圖面	Jack	051914					
ITEM NO.	DESCRIPTION	DRAWN	DATE					

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/05/14		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	08/05/14		DWG NO.	PJ-386xD-S125
APPROVED BY:	DATE	SHEET NO.	PART NO.	PJ-386xD-S125
Tony Kao	08/05/14	1 of 1		