



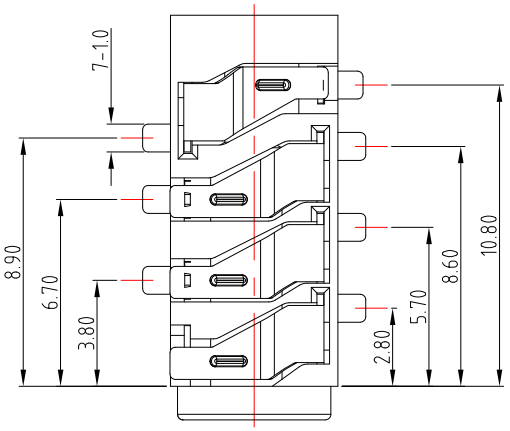


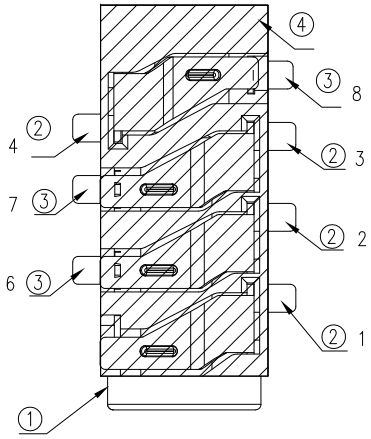


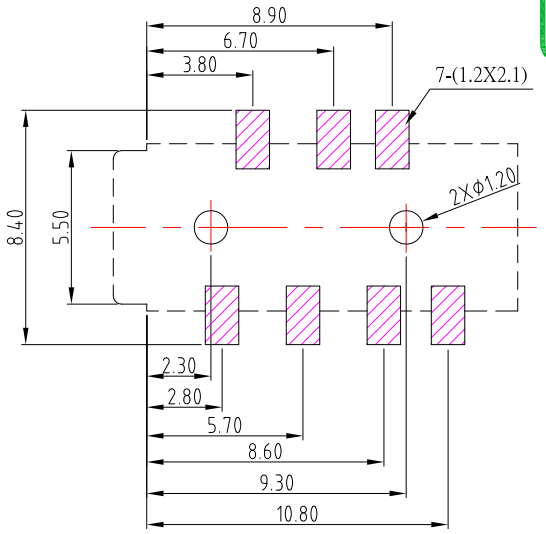


P.C.B LAYOUT
TOP VIEW



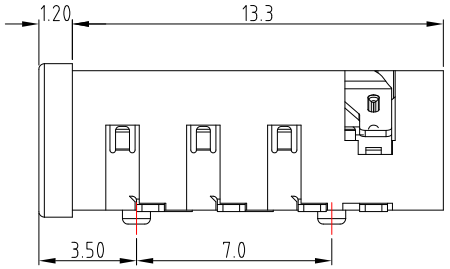

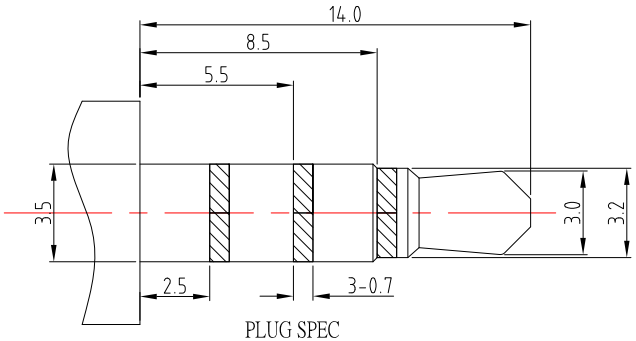

PLUG SPEC

Model No.	PJ-3917D-S214
Schematic code	

NOTES:

1. ELECTRICAL CHARACTERISTICS:
   1-1 CONTACT RESISTANCE: 50mΩ MAX. (INITIAL)
   100mΩ MAX. (FINAL)
   1-2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
   1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
2. MECHANICAL CHARACTERISTICS:
   2-1. PLUG INSERTION FORCE : 0.3~3.0KGS .
   2-2. PLUG WITHDRAWAL FORCE : 0.3~3.0KGS .
3. DURABILITY TEST: 5,000 CYCLES .

ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY
④	MYLAR			1
③	CONTACT 2	PHOSPHOR BRONZE	GOLD FLASH	3
②	CONTACT 1	PHOSPHOR BRONZE	GOLD FLASH	4
①	HOUSING	PA9T	BLACK	1

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	更新圖面	Jack	042320
4	更新圖面	Jack	041420
3	更新尺寸	Jack	051618
2	更新料號	Jack	091416
1	新增電路選項	Jack	031016

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

		DATE
DRAWN BY:	Jack Lu	04/23/20
CHECKED BY:	Jacky Chen	04/23/20
APPROVED BY:	Tony Kao	04/23/20

MAT'L		TITLE	JACK
FINISH		MODLE	PHONE JACK
SCALE	1 : 1	DWG NO.	PJ-3917D-S214
SHEET NO.	1 of 1	PART NO.	PJ-3917D-S214

SIZE A4 | VER R5