


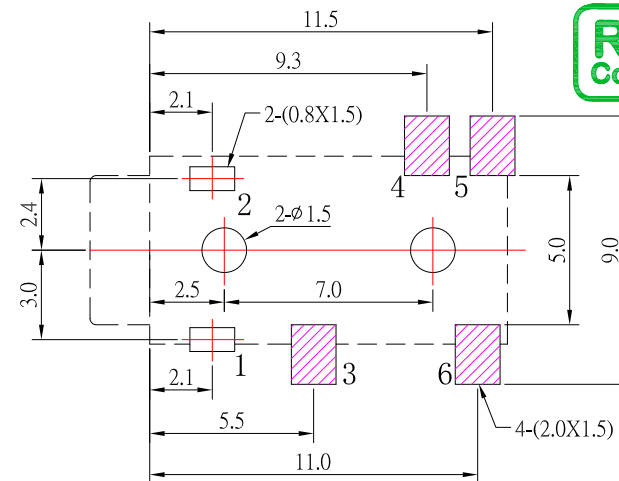
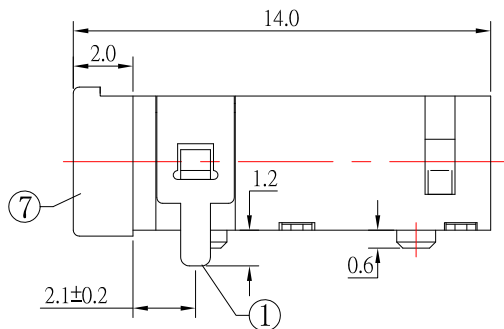


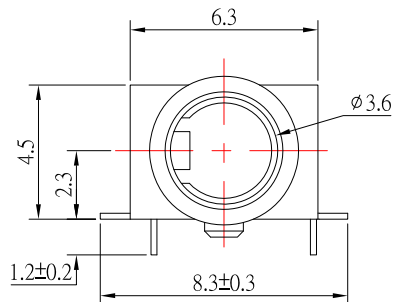

P.C.B LAYOUT
TOP VIEW

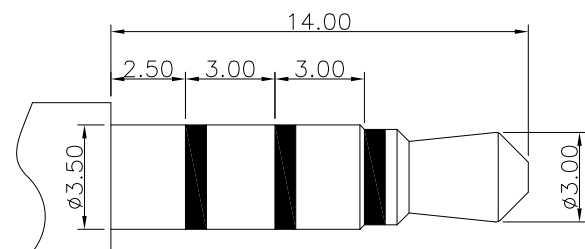


φ3.50mm 4 POLE PLUG

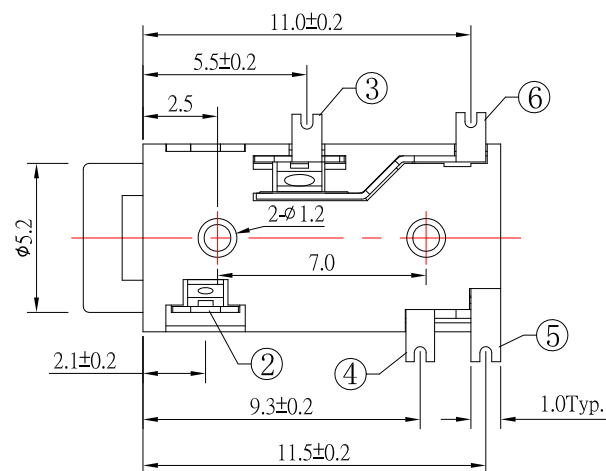

SPECIFICATION

- Rating : DC 30V 0.5A
- Contact resistance : $\leq 30\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles

SCHEMATIC



⑦	HOUSING	1	PA9T	
⑥	6#CONTACT FOOT	1	BRASS	Ag-Plating
⑤	5#CONTACT FOOT	1	BRASS	Ag-Plating
④	4#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
③	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
②	2#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
①	1#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/05/20	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-S3142C-S124
Jacky Chen	06/05/20	1 : 1	PART NO.	PJ-S3142C-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	SIZE
Tony Kao	06/05/20			A4
				VER
				R3

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

3	新增PCB LAYOUT尺寸	Jack	060520
2	更新尺寸	Jack	070819
1	更新樣式及SCHEMATIC邊項	Jack	041819
ITEM NO	DESCRIPTION	DRAWN	DATE