

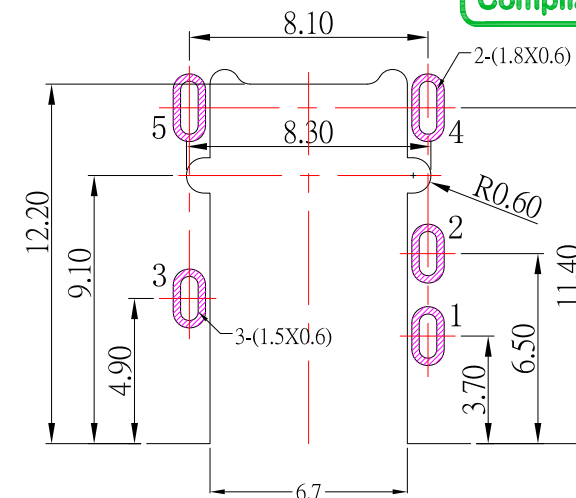
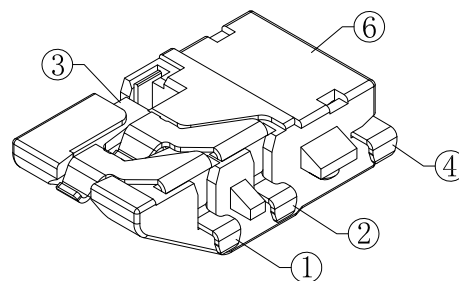


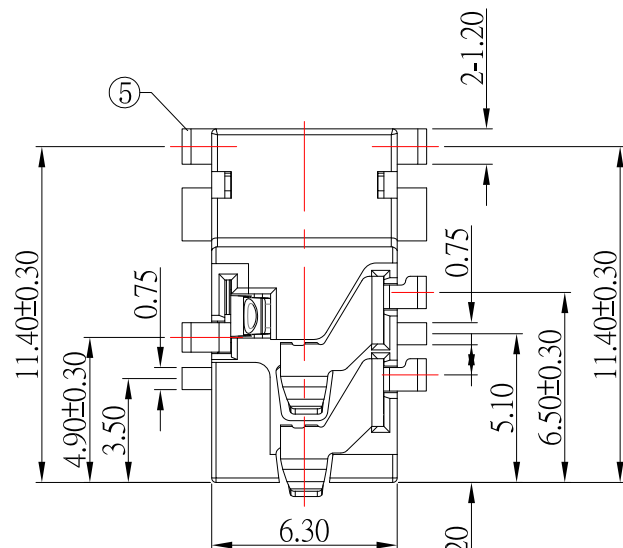



PCB LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 1.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles



SCHEMATIC

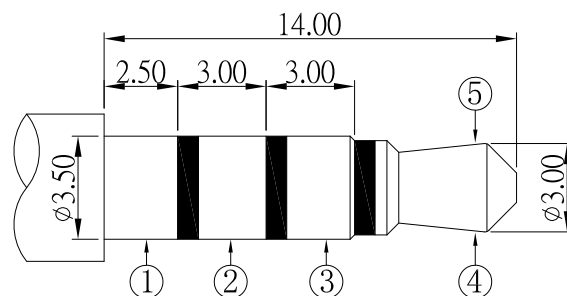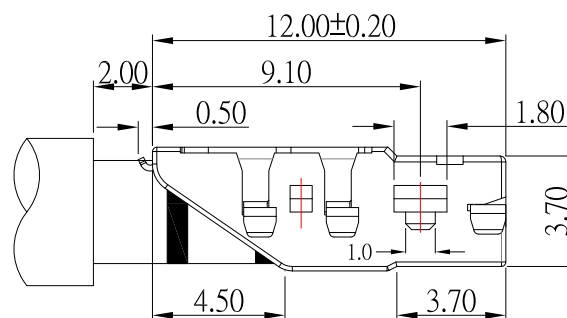

ø3.50mm 4 POLE PLUG

⑥	HOUSING	1	PA9T	
⑤	CONTACT FOOT #5	1	PHOSPHOR BRONZE	Au-Plating
④	CONTACT FOOT #4	1	PHOSPHOR BRONZE	Au-Plating
③	CONTACT FOOT #3	1	PHOSPHOR BRONZE	Au-Plating
②	CONTACT FOOT #2	1	PHOSPHOR BRONZE	Au-Plating
①	CONTACT FOOT #1	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	09/26/23			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK 板上高 2.2mm
Jacky Chen	09/26/23			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3178-S124
Tony Kao	09/26/23	1 : 1		
		SHEET NO.	PART NO.	PJ-S3178-S124
		1 of 1		

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

1	更新圖面	Jack	092623	TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
ITEM NO.	DESCRIPTION	DRAWN	DATE					