

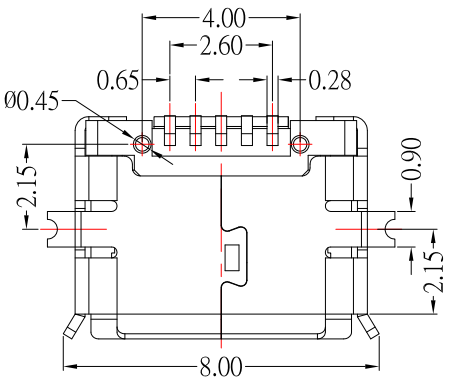

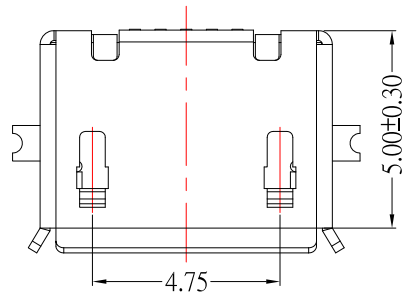



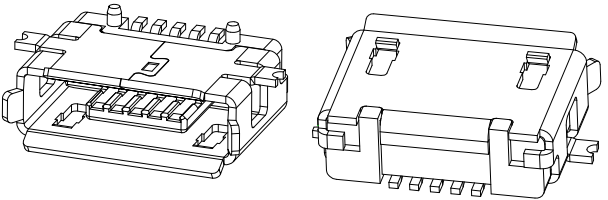



MRUSB-5AB-x-S347

SHELL鍍層:

TN
NI

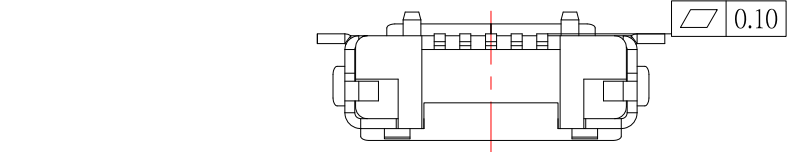

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP,
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: BRASS
- Finish:
- 2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls
Nickel under plated overall
 - 2.2 Shell: Nickel or Tin under Plated surface layer
- 3.SPECIFICATION:
- 3.1 CURRENT RATING: 1.8A(PIN1&5) , 1.0 A(PIN2&3&4) MAX
 - 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 V(ac) FOR 1min
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
 - 3.5 TOTAL MATING FORCE: 3.57 KgF MAX.
 - 3.6 TOTAL UNMATING FORCE: 1.0 KgF MIN.
 - 3.7 TEMPERATURE RANGE: -30°C ~ +80°C

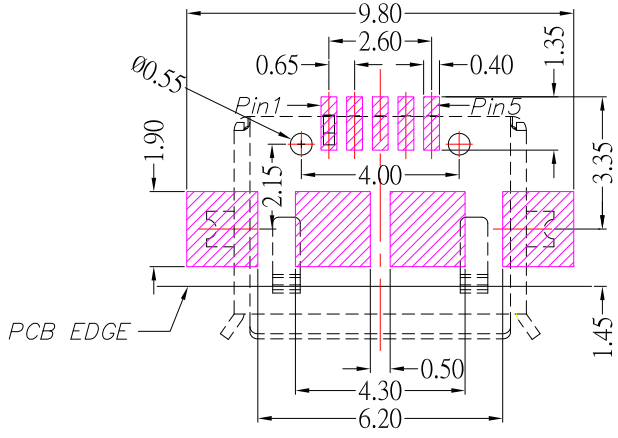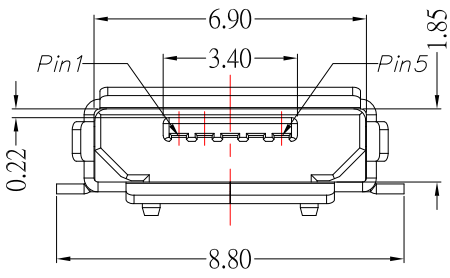

P.C.B LAYOUT MOUNTING PATTERN



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ±0.2	3RD. ANGEL'S		UNITS	MM
		Above 5 ~ 15 ±0.3				
		Above 15 ~ 30 ±0.4				
		Above 30 ~ 50 ±0.5				
		Angle ±0.3°				

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/07/16			
CHECKED BY:	DATE	FINISH	MODLE	MICRO USB 5PIN AB TYPE 全帖有柱
Jacky Chen	11/07/16			
APPROVED BY:	DATE	SCALE	DWG NO.	MRUSB-5AB-x-S347
Tony Kao	11/07/16	1 : 1		
		SHEET NO.	PART NO.	MRUSB-5AB-x-S347
				SIZE A4
				VER R1

1	更新圖面	Jack	110716
ITEM NO.	DESCRIPTION	DRAWN	DATE