

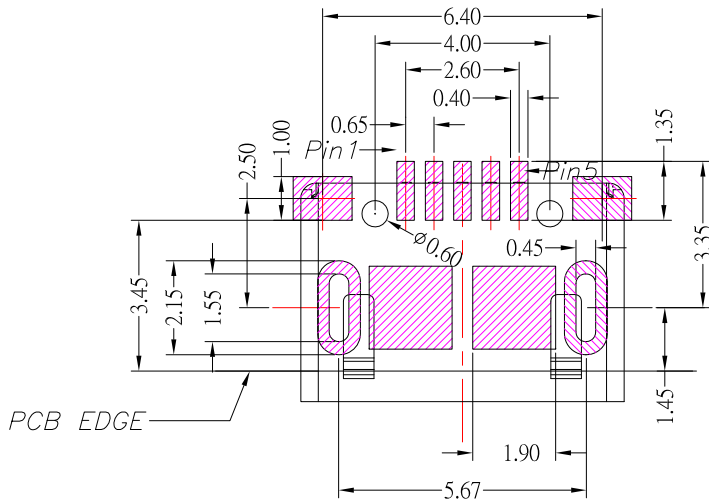
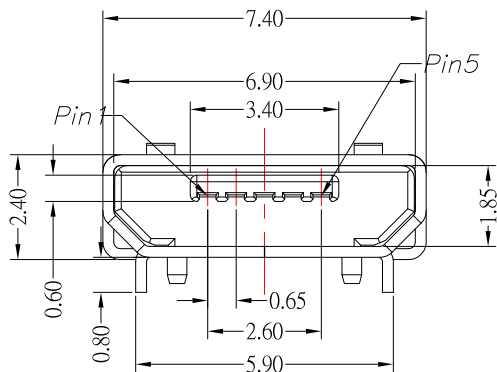
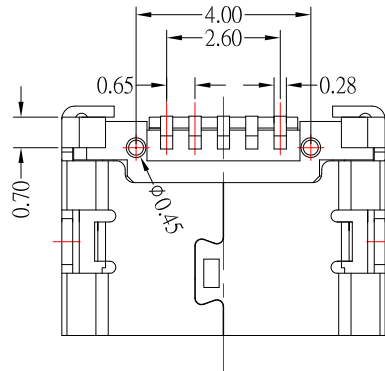
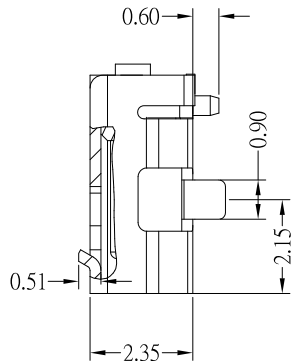
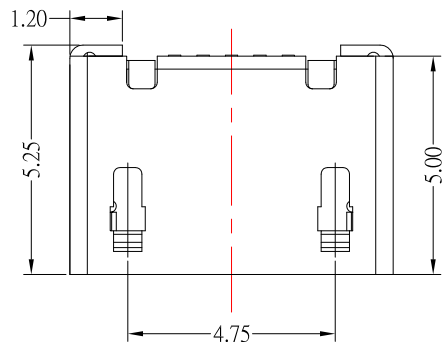


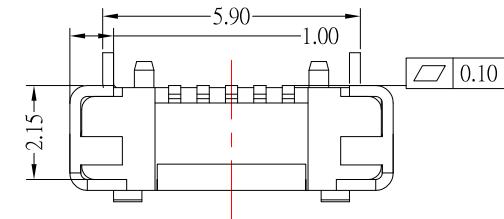

MRUSB-5B-ED8x-S347

SHELL鍍層:

TN
NI

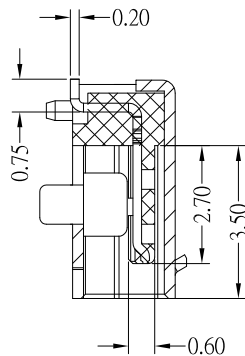

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: BRASS
- Finish:
- 2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls
Nickel under plated overall
- 3.SPECIFICATION:
- 3.1 CURRENT RATING: 1.0 A MAX
 - 3.2 DIELECTRIC WITHSSTANDING VOLTAGE:
100 V(ac) FOR 1min
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
 - 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
 - 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
 - 3.7 LIFE: 5,000 CYCLES
 - 3.8 TEMPERATURE RANGE: -30°C ~ +80°C

P.C.B LAYOUT MOUNTING PATTERN

6	新增尺寸	Jack	071320
5	更新PCB LAYOUT尺寸	Jack	121119
4	更新樣式	Lan	041519
3	新增PCB LAYOUT尺寸	Jack	112317
2	更新端子長度	Jack	060617
1	新增PCB LAYOUT尺寸	Jack	020317
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	07/13/20			
CHECKED BY:	DATE	FINISH	MODLE	MICRO USB B TYPE 前插5.67 後貼有柱 平口
Jacky Chen	07/13/20			
APPROVED BY:	DATE	SCALE	DWG NO.	MRUSB-5B-ED8x-S347
Tony Kao	07/13/20	1 : 1	PART NO.	MRUSB-5B-ED8x-S347
		SHEET NO.	1 of 1	
				SIZE A4
				VER R6