

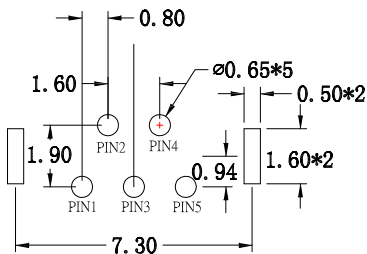
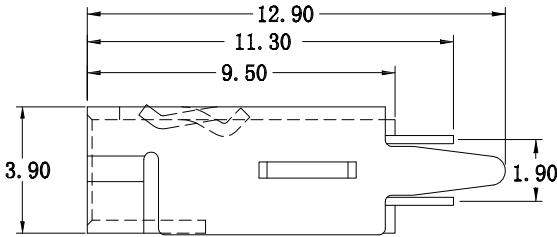


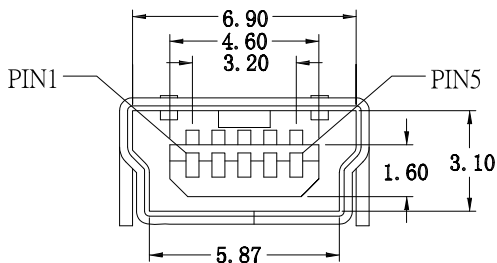


MUSB-5B-VD-x-S175

鍍層厚度 :

Blank : 1u"
2 : 15u"
3 : 30u"

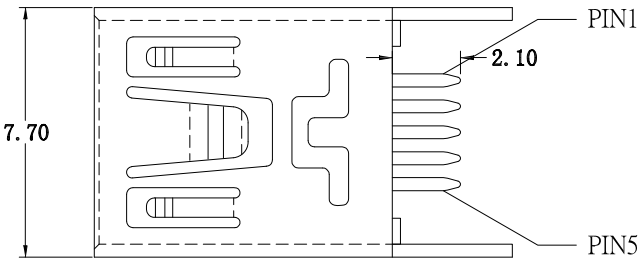

P.C.B LAYOUT MOUNTING PATTERN

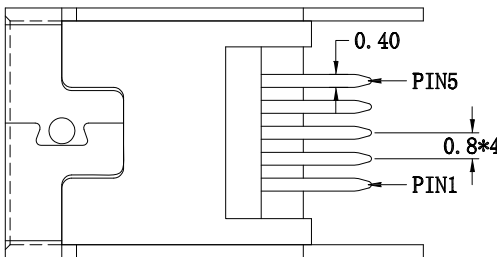

SPECIFICATIONS

Electrical :

- 1.Current Rating : 1.0A / contact terminal
- 2.Voltage Rating : 30V DC
- 3.Contact Resistance : 50 mΩ Max
- 4.Dielectric Withstanding Voltage : 300 V AC AT Sec Level
- 5.Insulation Resistance : 100 MΩ Min

Mechanical :

- 1.Connector Mate and Unmate Force
 - Mate force : 3.0 kgf (Max)
 - Unmate force : 0.7 kgf (Min)
- 2.Terminal Retention : 0.5 kgf (Min)

Material :

- 1.Housing : High Temperature Thermal Plastics, UL 94V-0 , LCP , Black
- 2.Contact : PHOSPHOR BRONZE
- 3.Shell : BRASS

Finish :

- 1.Contact : Plated Gold in Mating Area ; Tin Plated on Solder Balls ; Nickel under plated overall
- 2.Shell : Nickel under Plated surface layer

				DRAWN BY: Jack Lu			DATE: 02/27/25			MAT'L		TITLE		CONNECTOR	
				CHECKED BY: Jacky Chen			DATE: 02/27/25			FINISH		MODLE		MINI USB 5B/F 180 度 DIP 直插腳	
				APPROVED BY: Tony Kao			DATE: 02/27/25			SCALE		1 : 1		DWG NO.	
										SHEET NO.		1 of 1		PART NO.	
														MUSB-5B-VD-x-S175	
														SIZE	
														A4	
														VER	
														R4	