

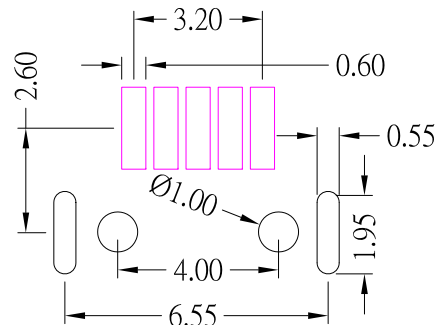
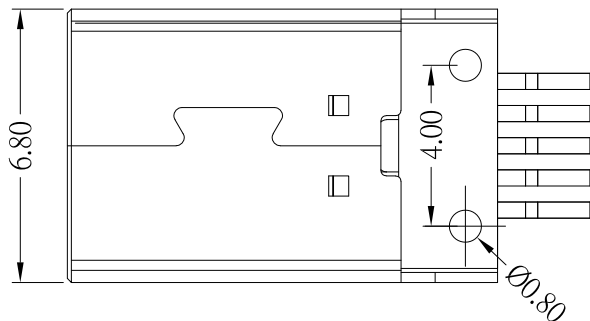
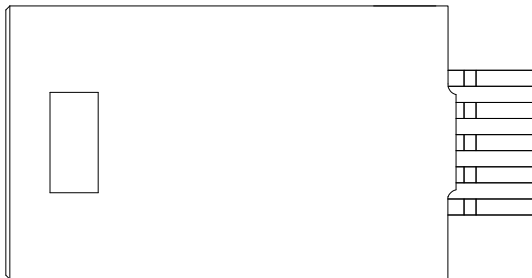


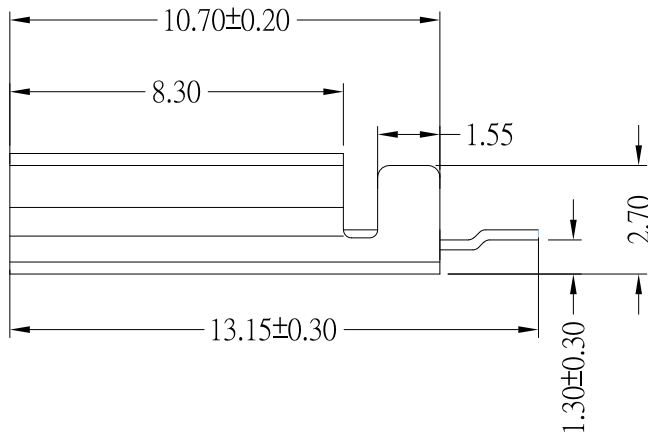

RECOMMENDED P.C.B LAYOUT

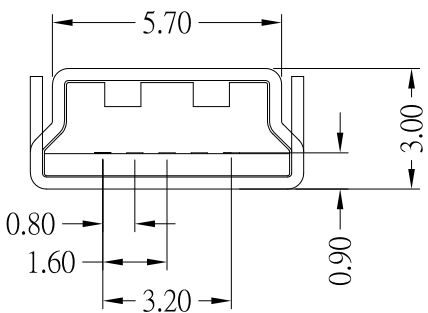

SPECIFICATIONS

Material:

- 1.Housing: LCP
- 2.Contact: Brass
- 3.Shell: Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

Electrical Characteristics:

- 1.rating: 30V AC , 1.5 A
- 2.Contact resistance: 30 mΩ Max
- 3.Insulation resistance: 1,000 MΩ Min
- 4.Dielectric withstanding voltage: 500V AC

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 30 ± 0.3 Above 30 ~ 50 ± 0.4 Above 50 ± 0.5 Angle ± 0.3° 3RD. ANGEL'S  UNITS MM						DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR	
											Jack Lu				
					CHECKED BY:	DATE	FINISH		MODLE	MINI USB 5P Male 板端 SMT帶柱					
					Jacky Chen	12/12/24									
3	更新尺寸	Jack	121224				SCALE	1 : 1	DWG NO.	MUSB-5BPLM1-S236	SIZE				
2	更新圖面	Jack	030223								A4				
1	新增尺寸	Jack	061121				APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	MUSB-5BPLM1-S236	VER		
ITEM NO.	DESCRIPTION	DRAWN	DATE										Tony Kao	12/12/24	R3