




MRUSB-5B-M15Ax-S347






SHELL鍍層:

TN

NI



剖面 A-A

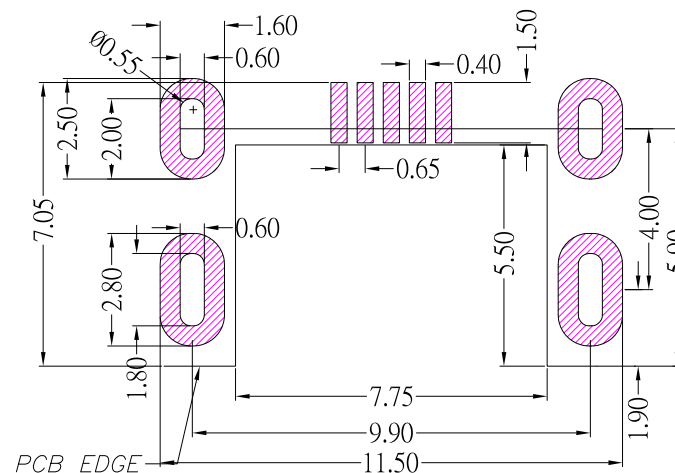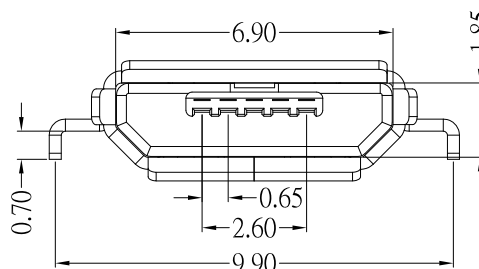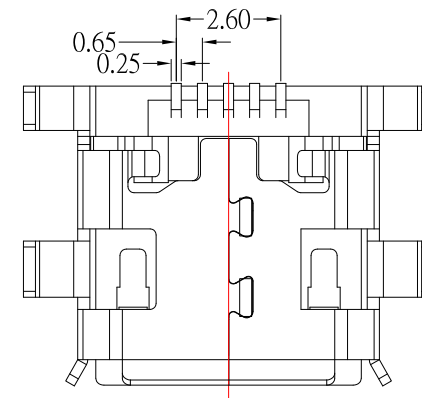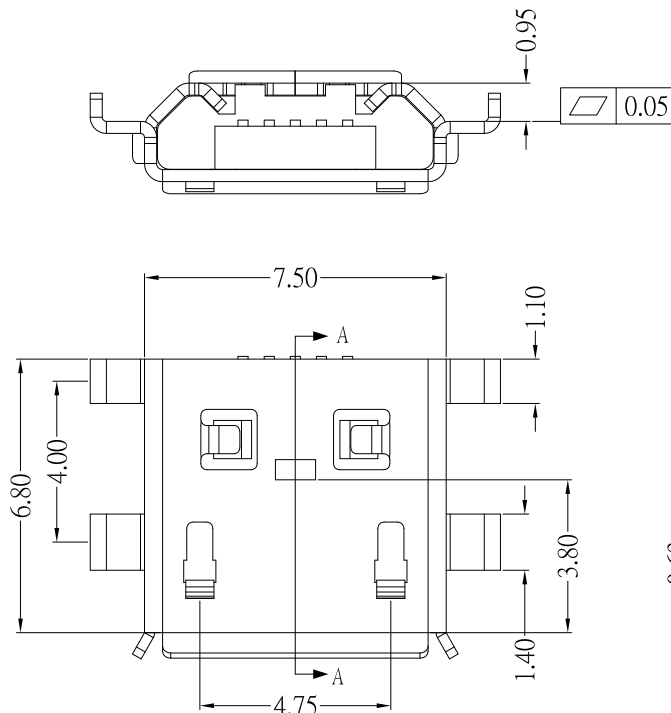

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: BRASS
- FINISH:
- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
 - 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR
TIN UNDER PLATED SURFACE LAYER
- 3.SPECIFICATION:
- 3.1 RATING: 1-5 PIN:1.8A , 2,3,4 PIN:1.0A
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1 MIN
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
 - 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
 - 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
 - 3.7 TEMPERATURE RANGE: -30℃ ~ +80℃

P.C.B LAYOUT MOUNTING PATTERN



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/06/18
DATE: 11/06/18
DATE: 11/06/18

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE	CONNECTOR
MODLE	MICRO USB 5B/F 沉板 板上H:1.5mm 四腳插
DWG NO.	MRUSB-5B-M15Ax-S347
PART NO.	MRUSB-5B-M15Ax-S347

SIZE
A4
VER
R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增尺寸	Jack	110618
1	更新圖面及料號	Jack	041218