



SUA-110M36x-x-S236

Shell Material :
Blank : BRASS
I : SPCC

Color :
White : W
Black : B

SPECIFICATIONS

Electrical:





- 1.Contact Resistance: 30 mΩ Max
- 2.Insulation Resistance: 1,000 MΩ Min
- 3.Dielectric Withstanding Voltage: 500 V AC

Material:

- 1.Housing: LCP
- 2.Contact: Brass
- 3.Shell: Brass / SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

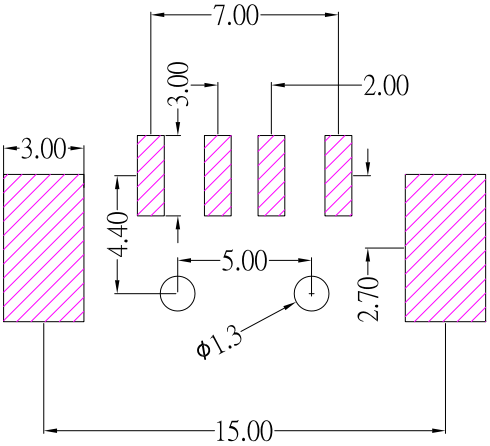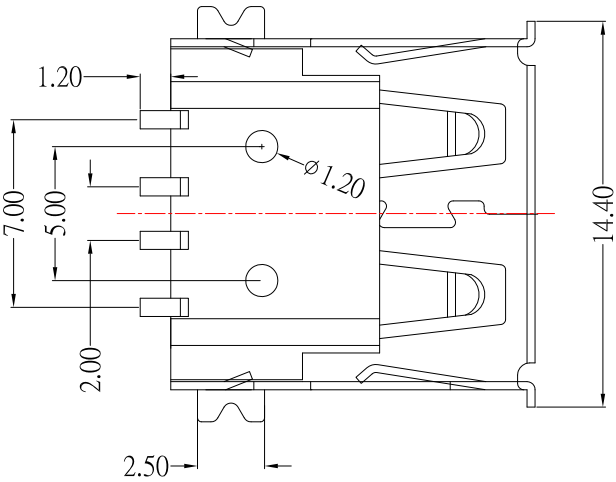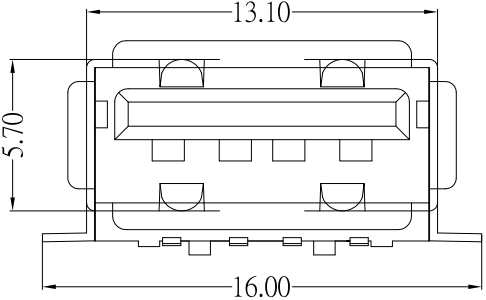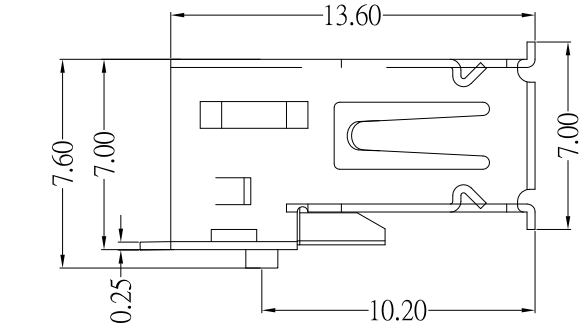

RECOMMENDED PCB LAYOUT

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	CONNECTOR
Jack Lu	02/14/22			
CHECKED BY:	DATE	FINISH	MODLE	USB AF SMT 外殼魚叉腳貼板 有捲邊 有柱1.2mm
Jacky Chen	02/14/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SUA-110M36x-x-S236
Tony Kao	02/14/22	1 : 1		
		SHEET NO.	PART NO.	SUA-110M36x-x-S236
		1 of 1		