
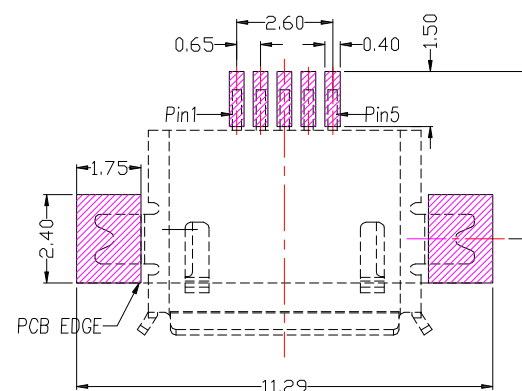
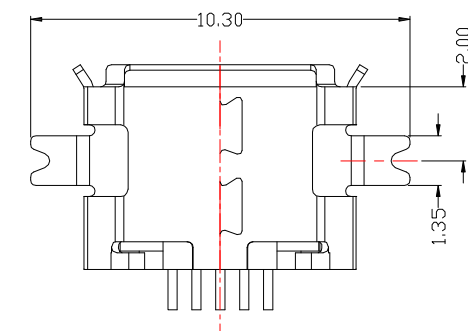
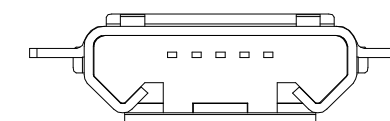
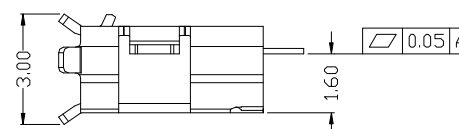
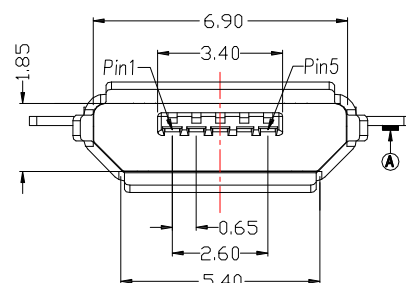
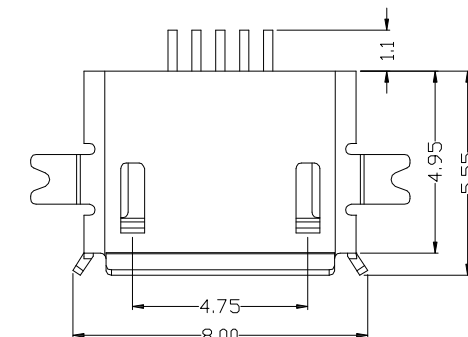


MRUSB-5B-M17x-S347

SHELL鍍層:

TN

NI



P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

1.1 HOUSING: LCP, UL94V-0, Black

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: BRASS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR

TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 RATING: 1.0A

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC FOR 1 MIN

3.3 CONTACT RESISTANCE: 50 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 TEMPERATURE RANGE: -30°C ~ +80°C

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

08/01/19

CHECKED BY:

Jacky Chen

DATE

08/01/19

APPROVED BY:

Tony Kao

DATE

08/01/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

MICRO USB 2 腳沉板/板下1.6mm

MRUSB-5B-M17x-S347

MRUSB-5B-M17x-S347

SIZE

A4

VER

R2

2	更新底部樣式	Jack	080119
1	更新為A0版	Jack	010417
ITEM NO.	DESCRIPTION	DRAWN	DATE