





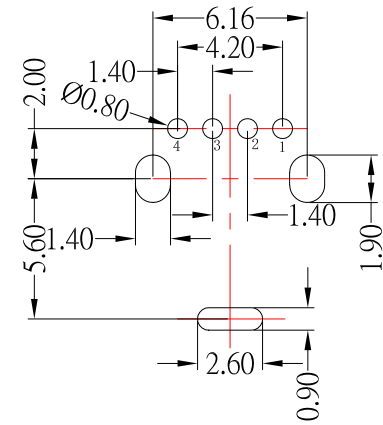


SUA-110P4x-x-S236

SHELL :	COLOR :
Blank : BRASS	Black : B
I : SPCC	White : W

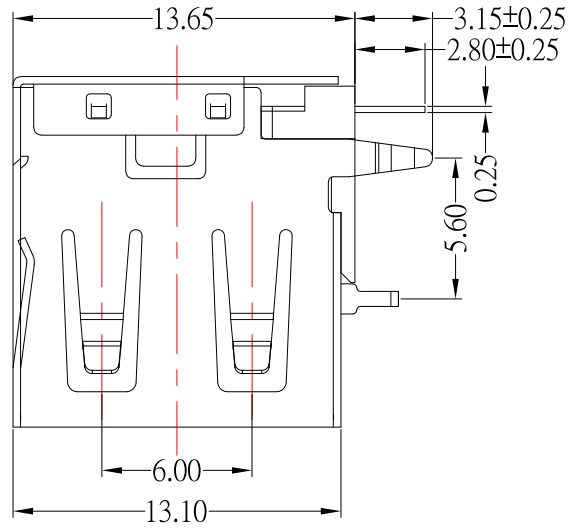

PCB LAYOUT

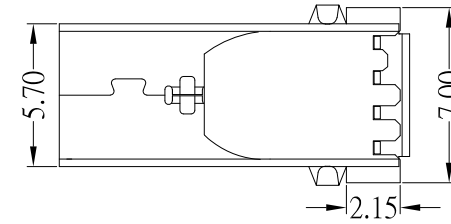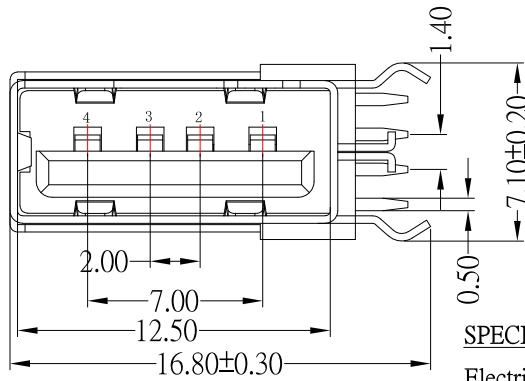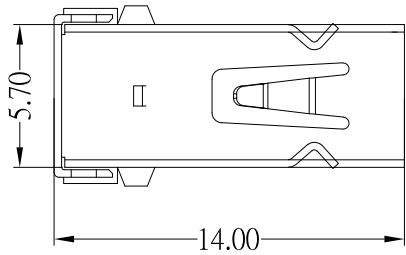

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

SPECIFICATIONS

Electrical:

- 1.Rating: 30V , 1.5A
- 2.Dielectric Withstanding Voltage: AC 500 V / 1MIN
- 3.Insulation Resistance: 1000 MΩ Min
- 4.Contact Resistance: 30 mΩ Max

Material:

- 1.Housing: PBT
- 2.Terminal: Brass
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MATL	TITLE	CONNECTOR
Jack Lu	06/23/25			
CHECKED BY:	DATE	FINISH	MODLE	USB AF側插短體Y型腳無捲邊 (L=14.0)
Jacky Chen	06/23/25			
APPROVED BY:	DATE	SCALE	DWG NO.	SUA-110P4x-x-S236
Tony Kao	06/23/25	1 : 1		
		SHEET NO.	PART NO.	SUA-110P4x-x-S236
		1 of 1		
				SIZE A4
				VER R1