

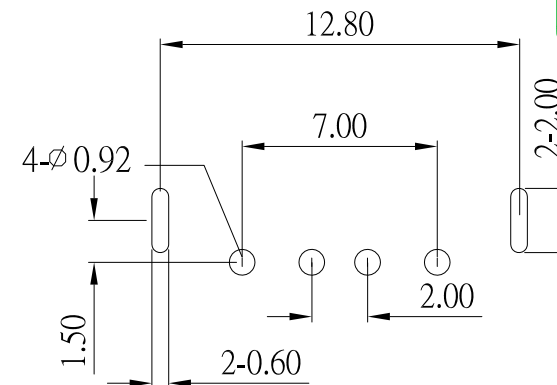


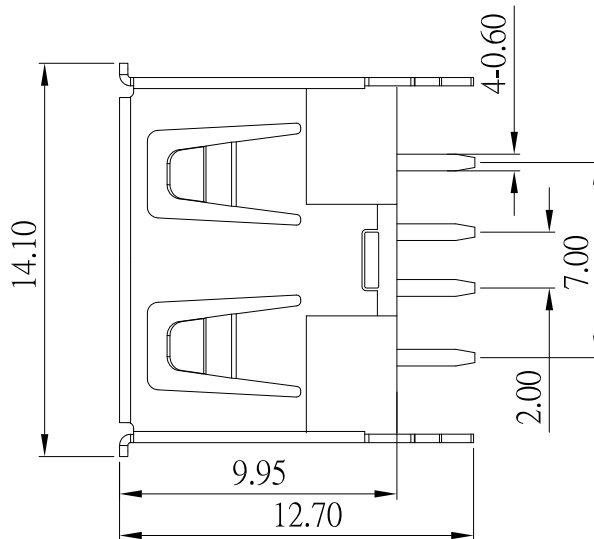


P.C.B LAYOUT MOUNTING PATTERN

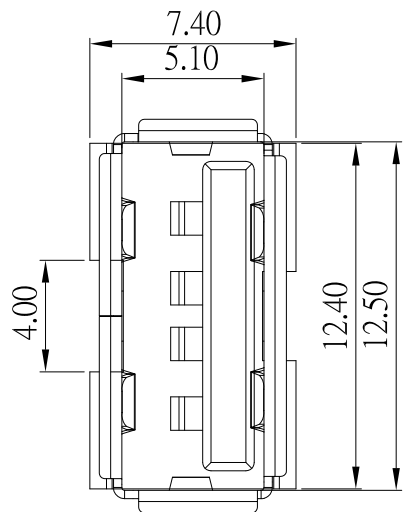

SUA-110V3x-x-S236

SHELL :	COLOR :
Blank : Copper Alloy	Black: B
I : SPCC	White : W

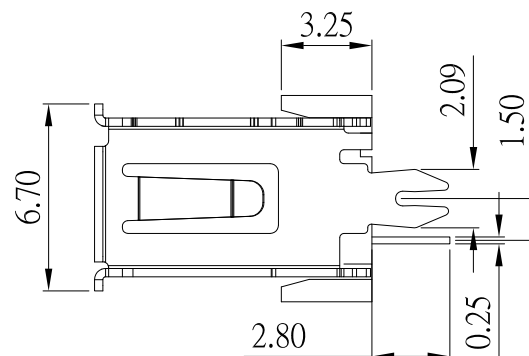

SPECIFICATIONS

Electrical:

- 1.Voltage Current Rating: 1.5A , 30V AC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Insulation Resistance: 1,000 MΩ Min

Material:

- 1.Housing: PBT
- 2.Contact: Phosphor Bronze
- 3.Shell: Copper Alloy / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/15/20
DATE: 10/15/20
DATE: 10/15/20

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	USB AF 短體9.95 直立式有捲邊(捲邊 無缺口)
SCALE	DWG NO.	SUA-110V3x-x-S236
SHEET NO.	PART NO.	SUA-110V3x-x-S236

SIZE
A4
VER
R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------