



SUA-110V5Bx-x-S236

SHELL :

Blank : Brass

I : SPCC

COLOR :

Black: B

White : W

SPECIFICATIONS

Electrical:






- 1.Contact Resistance: 30 mΩ Max
- 2.Dielectric Withstanding Voltage: 500 V AC
- 3.Insulation Resistance: 1,000 MΩ Min

Material:

- 1.Housing: PBT
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

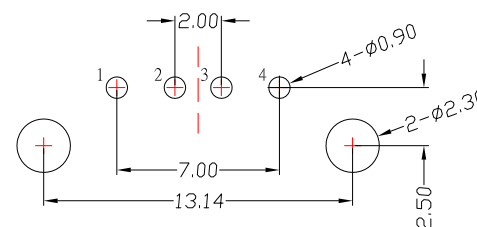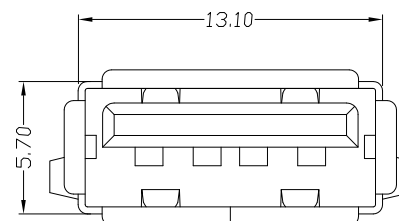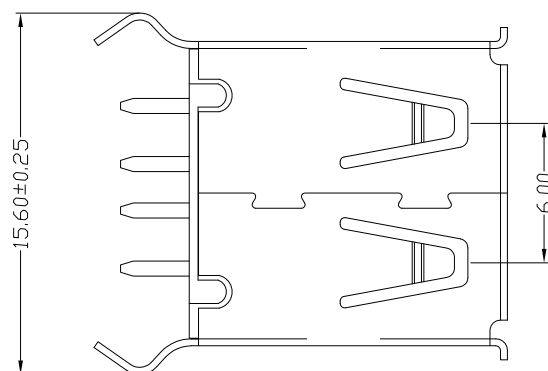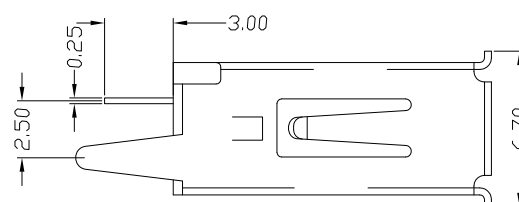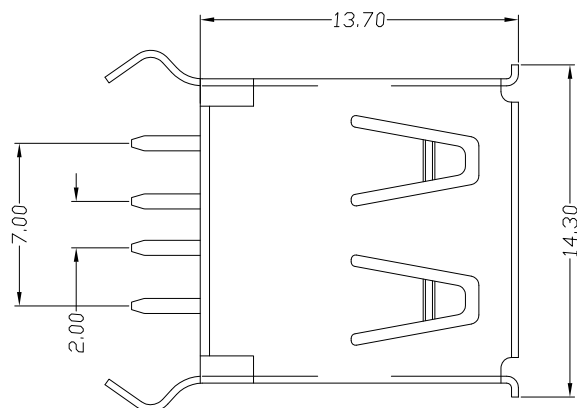

P.C.B LAYOUT MOUNTING PATTERN

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 04/11/19

CHECKED BY: Jacky Chen
DATE: 04/11/19

APPROVED BY: Tony Kao
DATE: 04/11/19

MATL	TITLE	CONNECTOR
FINISH	MODLE	USB A/F 直立式 插板彎腳有捲邊 L:13.7mm 腳距 2.50mm
SCALE	1 : 1	DWG NO. SUA-110V5Bx-x-S236
SHEET NO.	1 of 1	PART NO. SUA-110V5Bx-x-S236

SIZE
A4
VER
R