



SUA-210V2CI-x-S236

COLOR :

Black : B
White : W

RECOMMENDED PCB LAYOUT

SPECIFICATIONS

Electrical:







- 1.Contact Resistance: 30 mΩ Max
- 2.Insulation Resistance: 1,000 MΩ Min
- 3.Dielectric Withstanding Voltage: 500V AC
- 5.Mating Force: 35N Max
- 6.Umating Force: 10N Min

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

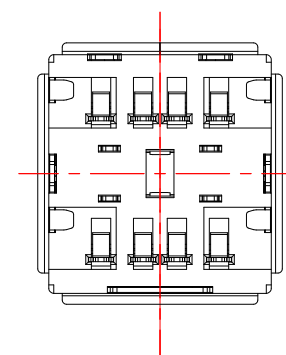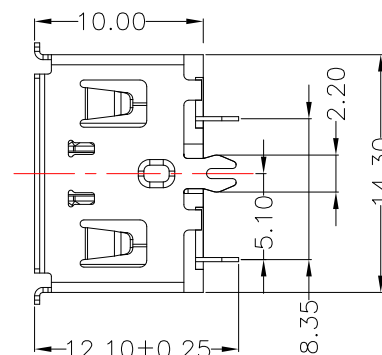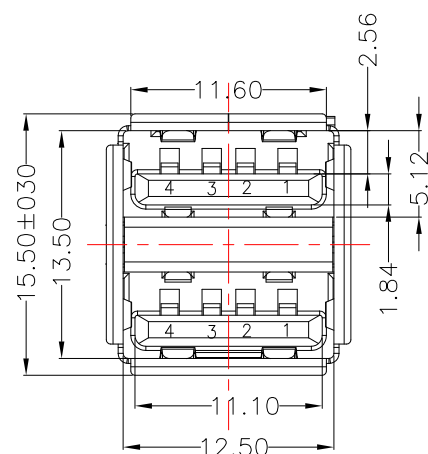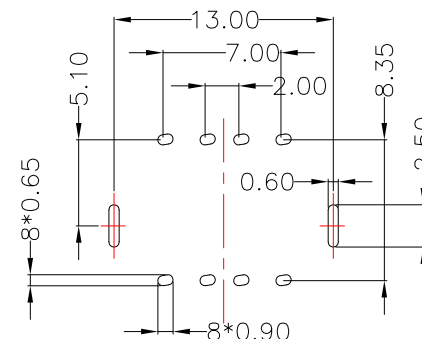

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/17/20
DATE: 09/17/20
DATE: 09/17/20

MATL		TITLE	CONNECTOR
FINISH		MODLE	USB AF 180 度 直立式短體10.0 有捲邊 雙層
SCALE	1 : 1	DWG NO.	SUA-210V2CI-x-S236
SHEET NO.	1 of 1	PART NO.	SUA-210V2CI-x-S236

ITEM NO.	DESCRIPTION	DRAWN	DATE