

SUA-110V-30x-S242


鍍層厚度：


Blank : 1u"
2 : 15u"
3 : 30u"

RoHS Compliant

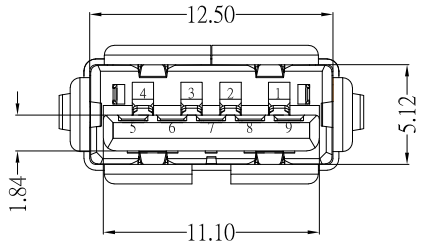


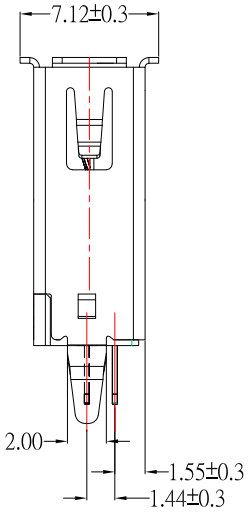

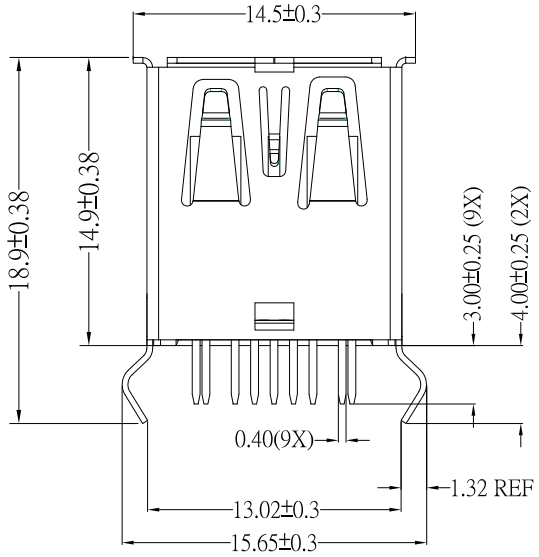

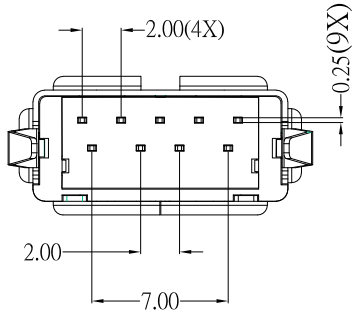

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

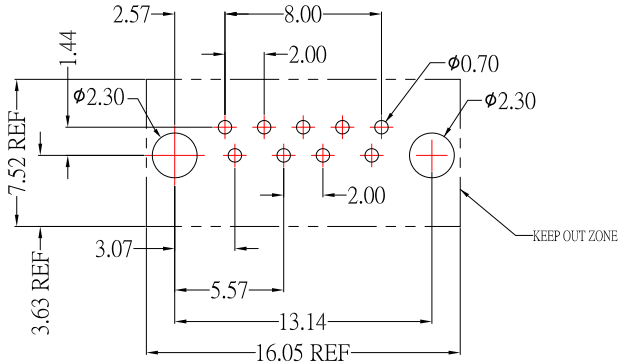

P.C.B LAYOUT MOUNTING PATTERN

NOTE:

1.MATERIAL:

1.1 Housing: LCP

1.2 Contact: Brass

1.3 Shell: Brass

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

2.2 Shell: Nickel under Plated surface layer

3.SPECIFICATION:

3.1 Current Rate: 1.5 A

3.2 Insulator Resistance:100MΩ Min

3.3 Dielectric Strength: 100V AC

3.4 Contact Resistance: 30mΩ Max

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新材質	Jack	052026
2	更新圖面	Jack	051420
1	新增顏色標示	Jack	112018

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 05/20/26	MAT'L	
CHECKED BY: Jacky Chen	DATE 05/20/26	FINISH	
APPROVED BY: Tony Kao	DATE 05/20/26	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	CONNECTOR		
MODLE	USB 3.0 A/F 180 度 直插		
DWG NO.	SUA-110V-30x-S242	SIZE	A4
PART NO.	SUA-110V-30x-S242	VER	R3