

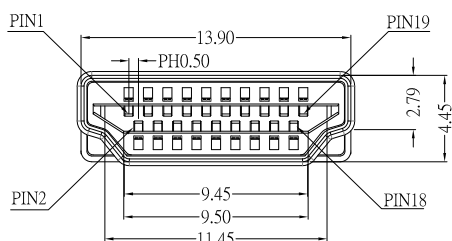
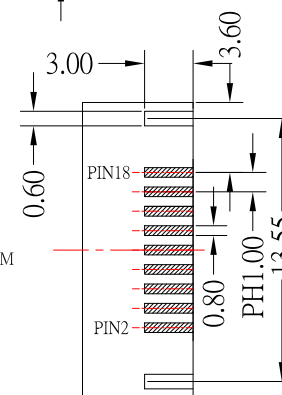

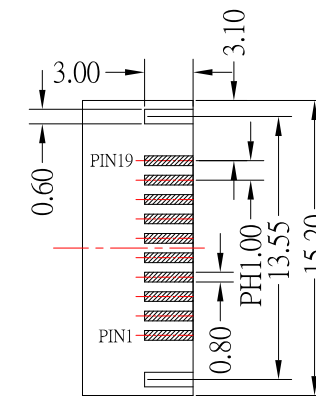

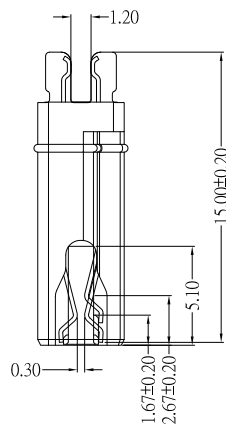





HDMI-19APL3x-S165

外殼電鍍材質：

G : Au
NI : Nickel

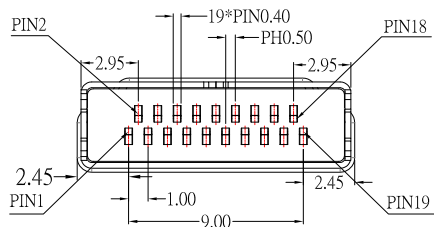

NOTE :

1. SPECIFICATION:
 - 1.1 CURRENT RATING: 0.5 Amp Max.
 - 1.2 VOLTAGE RATING: 40 V ac(r.m.s) Max.
 - 1.3 CONTACT RESISTANCE: 10mΩ Max.
 - 1.4 NSULATION RESISTANCE: 100MΩ Min.
 - 1.5 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V Min. (for 1 minute)
 - 1.6 OPERATION TEMPERATURE RANGE: -25°C~85°C
2. MECHANICAL
 - 2.1 INSERTION FORCE: 4.5KGF MAXMUM
 - 2.1 WITHDRAWAL FORCE: 1.0KGF MINIMUM; 4.0KGF MAXMUM
3. Material:
 - 3.1 Housing: LCP
 - 3.2 Contact: Phosphor Bronze
 - 3.3 Shell: SPCC
4. Finish:
 - 4.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
 - 4.2 Shell: Nickel / Gold under Plated surface layer

10	更新Contact材質	Jack	112321
9	更新料號	Jack	111821
8	更新外殼材質	Jack	111621
7	更新圖面	Jack	080219
6	更新外殼底部樣式	Jack	112718
5	更新端子鍍層	Jack	112317
4	更新為AO版	Jack	042017
3	更新夾板尺寸	Jack	022515
2	更新鍍層代號及更新pcb layout尺寸	Jack	112714
1	更新鍍層代號	Jack	111214
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/23/21		MODLE	HDMI A TYPE 夾板公頭 H:1.2mm
CHECKED BY:	DATE	FINISH	DWG NO.	HDMI-19APL3x-S165
Jacky Chen	11/23/21		PART NO.	HDMI-19APL3x-S165
APPROVED BY:	DATE	SCALE	SHEET NO.	1 of 1
Tony Kao	11/23/21	1 : 1		
			SIZE	A4
			VER	R10