

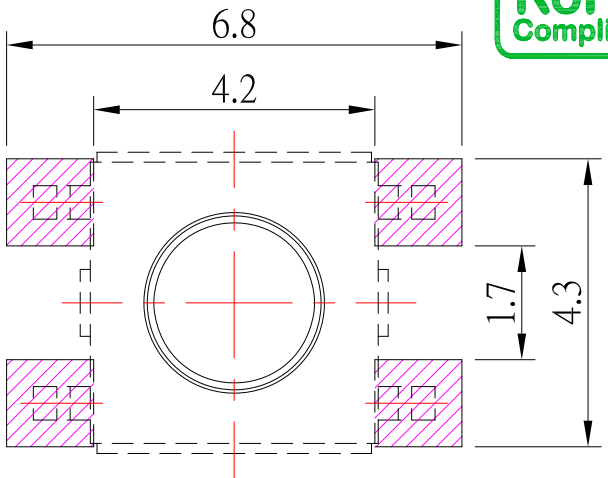

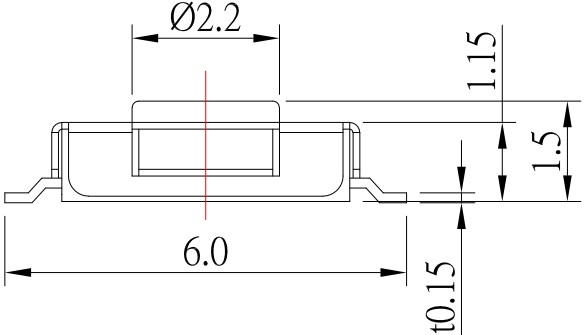




P.C.B LAYOUT

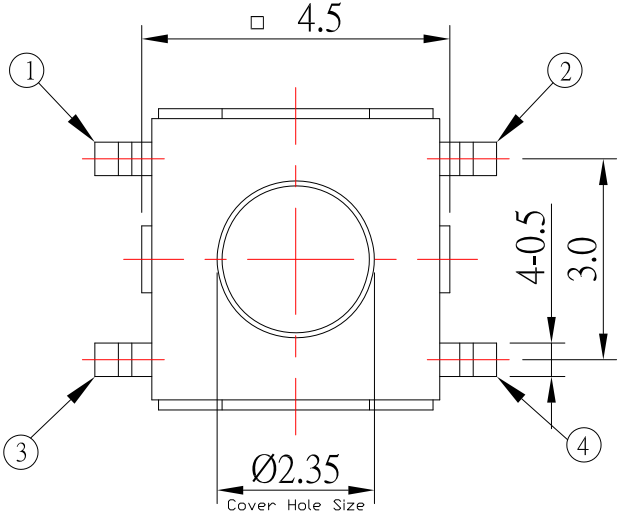

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA		
Circuit	1C - 1P		
Contact Resistance	100mΩ Max.		
Travel	0.2 ± 0.1mm		
Operating Force	2	160 ± 50gf	3 250 ± 50gf
Operating Life (cycles)	100,000		

E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	SUS	Ni plated
B	CASE	1	LCP	
A	STEM	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

3	更新樣式和新增材質表	Jack	102424
2	更新樣式	Jack	011218
1	更新圖面	Jack	080315
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	10/24/24	FINISH	MODLE	TACT SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	TS-A27-x-S126
Jacky Chen	10/24/24	1 : 1	PART NO.	TS-A27-x-S126
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	10/24/24			
				SIZE A4
				VER R3