


RoHS Compliant





CIRCUIT DIAGRAM

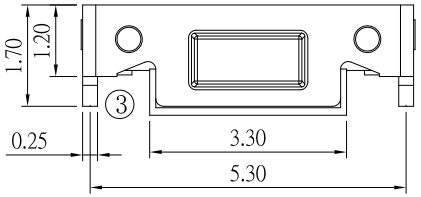

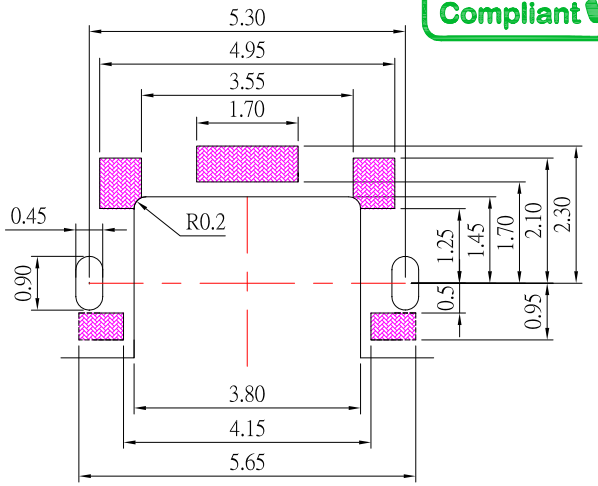

P.C.B LAND PATTERN



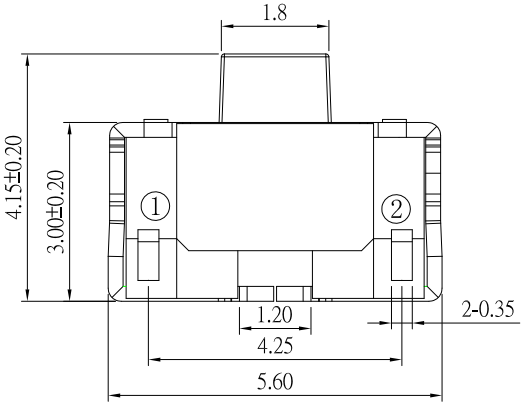

SPECIFICATIONS

Rating	50mA, 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V
Contact Resistance	100mΩ Max.
Operating Force	160 ± 40gf
Travel	0.2 ± 0.1mm
Operating Life	50,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	THERMINAL	2	PHOSPHOR BRONZE	Ag plated
D	CONTACT	3	STAINLESS STEEL	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	LCP	White
A	STEM	1	LCP	White

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	新增Travel	Jack	022323
4	更新CONTACT數量	Jack	011022
3	更新規格	Jack	111921
2	新增COVER 鍍層	Jack	102121
1	更新材質顏色	Jack	102318

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 02/23/23	MAT'L	
CHECKED BY: Jacky Chen	DATE 02/23/23	FINISH	
APPROVED BY: Tony Kao	DATE 02/23/23	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	SWITCH		
MODLE	TACT SWITCH		
DWG NO.	TS-A28- 2-S246	SIZE	A4
PART NO.	TS-A28- 2-S246	VER	R5