

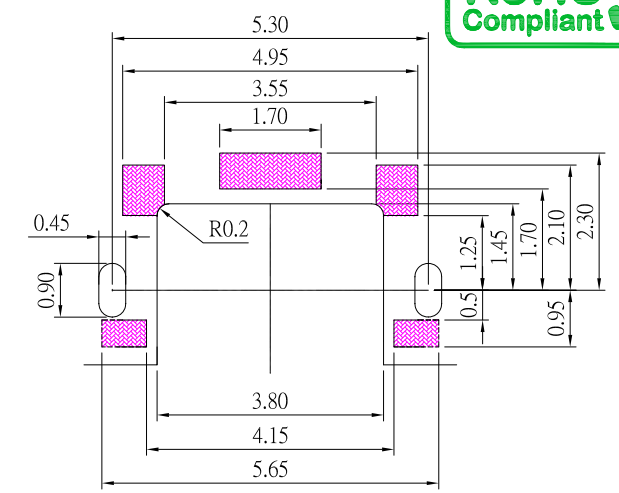
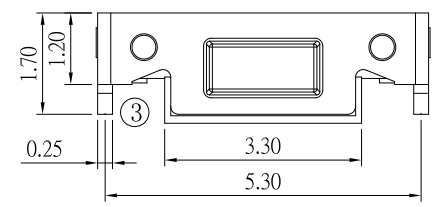


CIRCUIT DIAGRAM

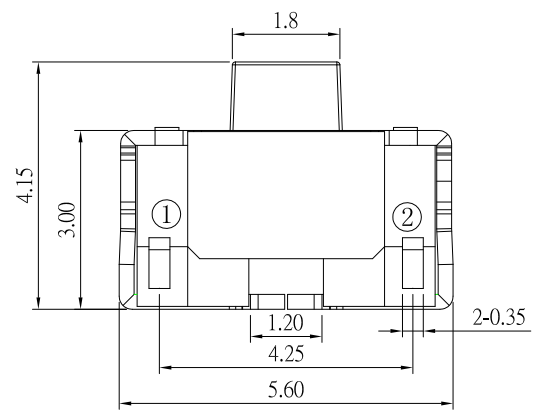

P.C.B LAND PATTERN



SPECIFICATIONS

Rating	0.05A 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	180 ± 30gf
Operating Life	100,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	THERMINAL	2	PHOSPHOR BRONZE	Ag plated
D	CONTACT	3	STAINLESS STEEL	Ag plated
C	COVER	1	PHOSPHOR BRONZE	
B	BASE	1	LCP	Black
A	STEM	1	LCP	Black

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: Jack Lu
 CHECKED BY: Jacky Chen
 APPROVED BY: Tony Kao

DATE: 11/07/13
 DATE: 11/07/13
 DATE: 11/07/13

MAT'L: SWITCH
 FINISH: TACT SWITCH
 SCALE: 1 : 1
 SHEET NO.: 1 of 1

TITLE: SWITCH
 MODLE: TACT SWITCH
 DWG NO.: TS-A28- 2-S246
 PART NO.: TS-A28- 2-S246

SIZE: A4
 VER: R

ITEM NO.	DESCRIPTION	DRAWN	DATE