





3 CIRCUITS OR MORE

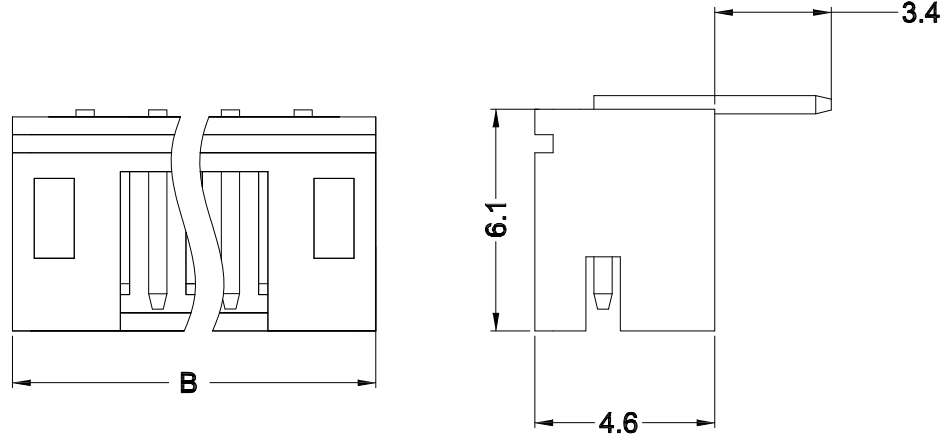




2 CIRCUITS

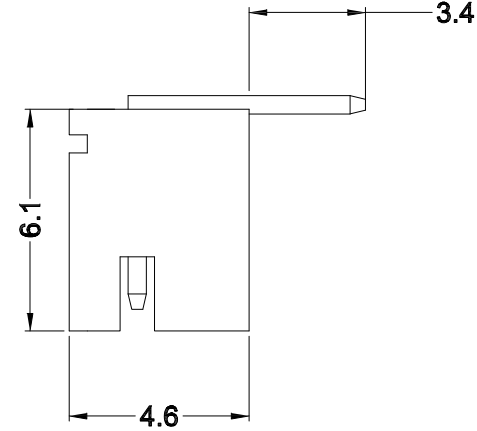

SPECIFICATIONS

Current rating : 2.0A AC , DC
Voltage rating : 100V AC , DC
Temperature rating : -25°C ~ +85°C
Insulation resistance : 1,000M Ω min.
Withstand voltage : 800V AC/minute
Contact resistance : 20m Ω /Max
Material:
Housing : Nylon 66, UL94V-2
Pin : Brass / Tin-plated
Contact : Phosphor Bronze

PART NO.	Dimensions	
	A	B
WF-2001RD02	2.00	6.00
WF-2001RD03	4.00	8.00
WF-2001RD04	6.00	10.00
WF-2001RD05	8.00	12.00
WF-2001RD06	10.00	14.00
WF-2001RD07	12.00	16.00
WF-2001RD08	14.00	18.00
WF-2001RD09	16.00	20.00
WF-2001RD10	18.00	22.00
WF-2001RD11	20.00	24.00
WF-2001RD12	22.00	26.00
WF-2001RD13	24.00	28.00
WF-2001RD14	26.00	30.00
WF-2001RD15	28.00	32.00
WF-2001RD16	30.00	34.00
WF-2001RD17	32.00	36.00
WF-2001RD18	34.00	38.00

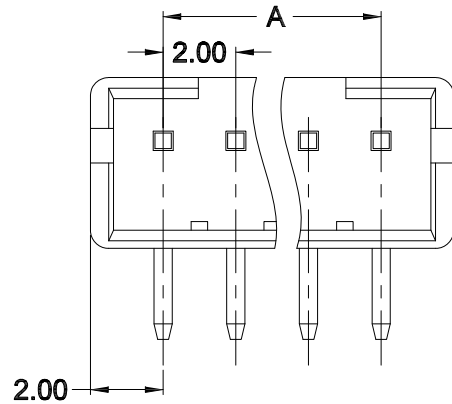

P.C.B LAYOUT MOUNTING PATTERN

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
11/13/12
DATE
11/13/12
DATE
11/13/12

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
WAFER 2.0 DIP 90度 不打孔 (JST)
WF-2001RDxx-S208
WF-2001RDxx-S208

SIZE
A4
VER
R