

PS-008x-R-S018

L: SELF-LOCK



N: NON-LOCK

SPECIFICATIONS

1. Rating: AC 250V , 3.0A
- 2.Contact Resistance: 30 mΩMax
- 3.Dielectric Withstanding Voltage: 500 V AC / 1 minute
- 4.Insulation Resistance: 100 MΩ Min
- 5.Operating Force : 100 ± 50gf
- 6.Life Cycle : 10,000 cycles

8	CONTACT	BRASS	1
7	SPRING	STAINLESS STEEL	2
6	NUTS	PA66	1
5	TERMINAL	BRASS	2
4	SLIDER	POM	1
3	BASE	PA66	1
2	CASE	PA66	1
1	KNOB	ABS	1
NO.	PART NAME	MATERIAL	QTY.

MAT'L		TITLE	SWITCH	
FINISH		MODLE	PUSH SWITCH	
SCALE	1 : 1	DWG NO.	PS-008x-R-S018	SIZE A4
SHEET NO.	1 of 1	PART NO.	PS-008x-R-S018	VER R

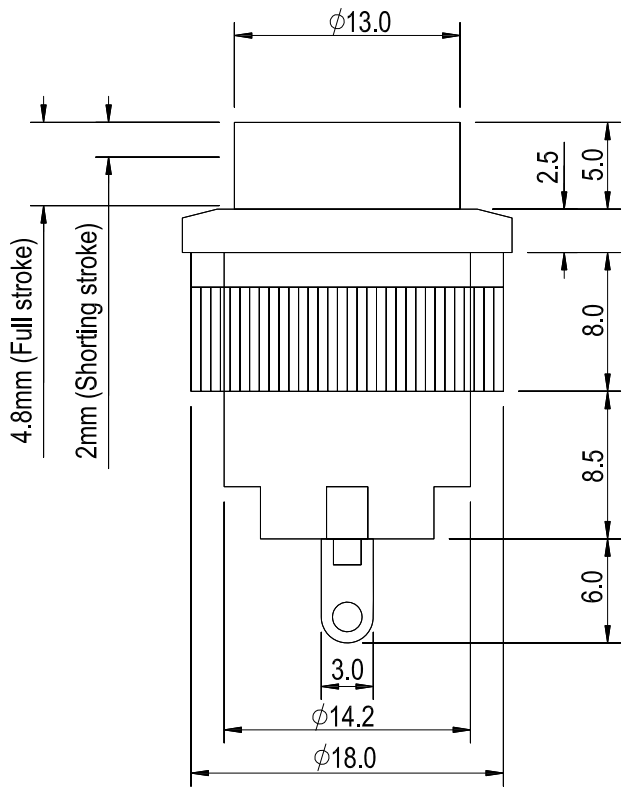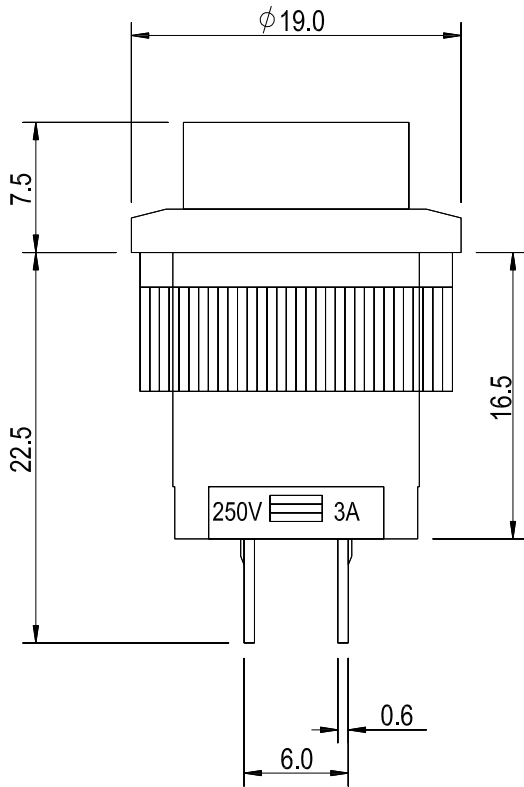

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/13/17
DATE: 06/13/17
DATE: 06/13/17