


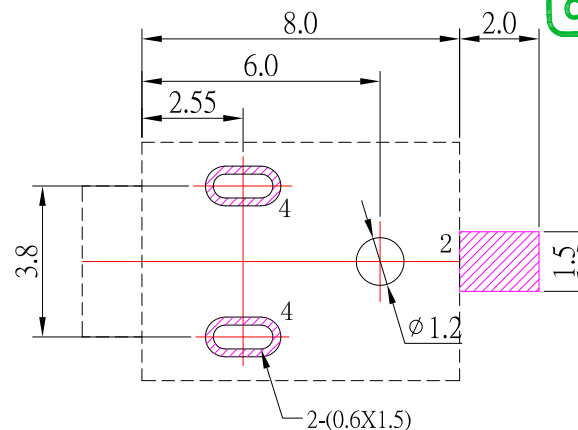
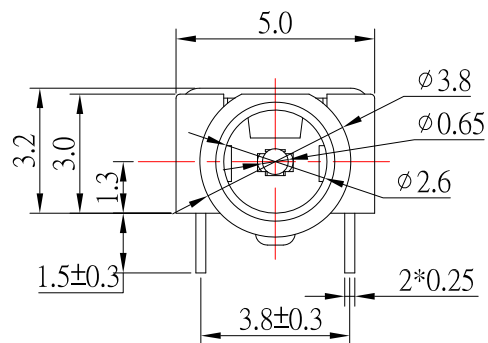
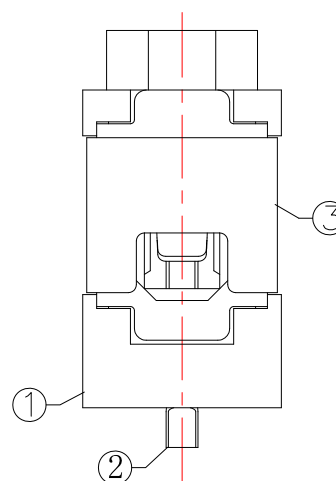


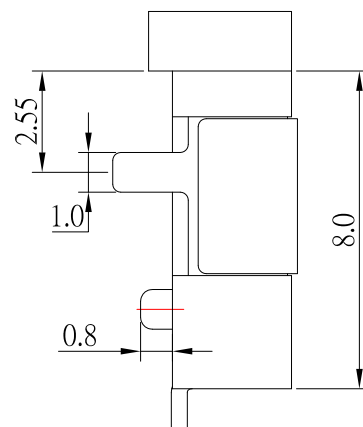

P.C.B LAYOUT
TOP VIEW

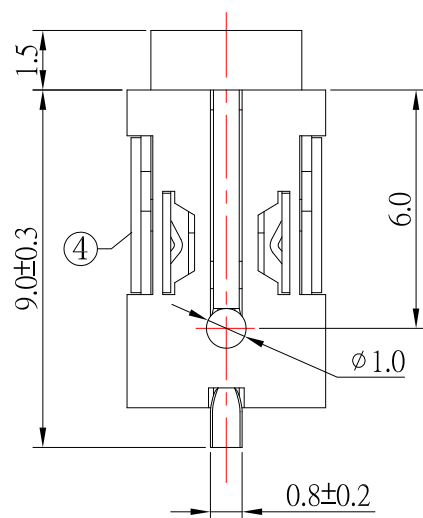


SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 2-20N;
- 6.life test : 5,000 cycles °

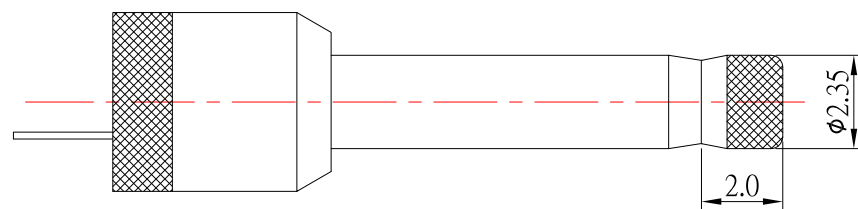

RECOMMENDED PLUG

4	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
3	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
2	PIN	1	BRASS	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	04/14/23	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-064D-6-S124
Jacky Chen	04/14/23	SHEET NO.	PART NO.	DC-064D-6-S124
APPROVED BY:	DATE			
Tony Kao	04/14/23			

2	新增尺寸	Jack	041423
1	更新尺寸	Jack	070821
ITEM NO.	DESCRIPTION	DRAWN	DATE