
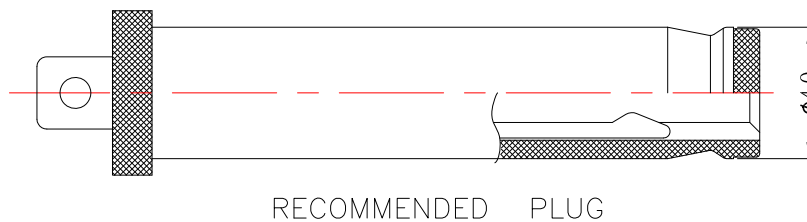


P.C.B LAYOUT
TOP VIEW

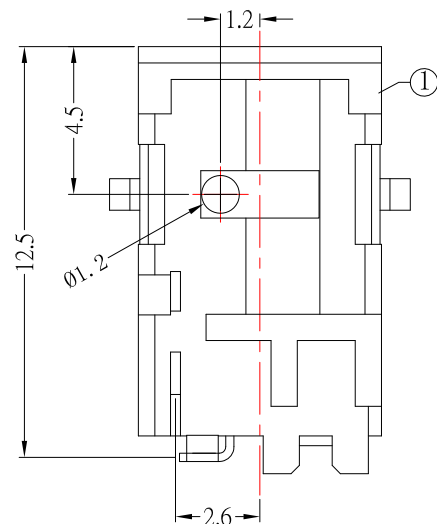

MODEL NO.	DC-D030-1.65
SCHEMATIC	

SPECIFICATION

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : $\leq 50m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑥	CENTER PIN	1	BRASS	Ag-Plating
⑤	COAT	1	BRASS	Ag-Plating
④	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
③	FLAT PIECE	1	BRASS	Ag-Plating
②	CURVE PIECE	1	SUS	Ag-Plating
①	HOUSING	1	PBT	

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/12/17		MODLE	DC JACK
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	06/12/17		DWG NO.	DC-D030-1.65-S124
APPROVED BY:	DATE	SHEET NO.	PART NO.	DC-D030-1.65-S124
Tony Kao	06/12/17	1 of 1		

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	Above 5 ~ 15 ±0.3	Above 15 ~ 30 ±0.4	Above 30 ~ 50 ±0.5	Angle ±0.3	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--------------	-------------------	--------------------	--------------------	------------	--------------	-------	----

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新尺寸	Jack	061217