

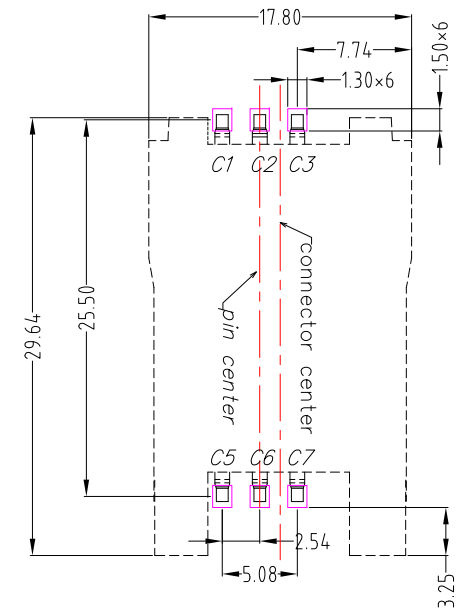
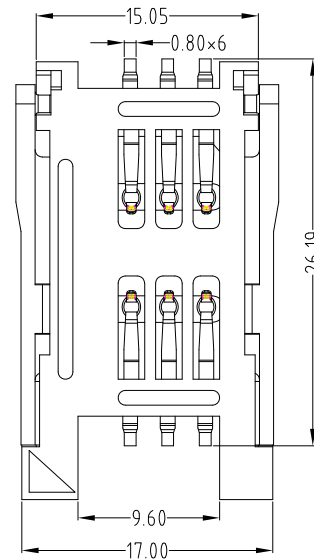
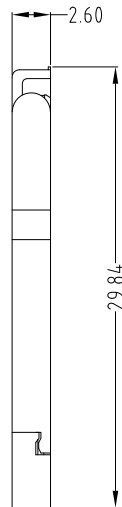
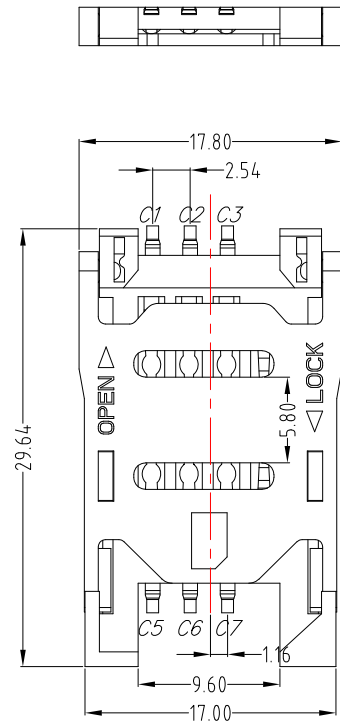




PCB LAYOYT

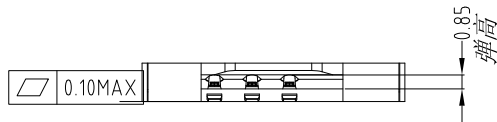

SIM CARD

SIM卡引脚功能定义

触电极	分配	触电极	分配
C1	电源电压 VCC	C5	地 GND
C2	复位 RST	C6	编程电压 VPP
C3	时钟 CLK	C7	输入/输出 I/O
C4	不提供触点	C8	不提供触点

SPECIFICATION

Electrical :

- 1.Current Rating: 1.0A AC/DC
- 2.Voltage Rating: 50V AC/DC
- 3.Contact Resistance: 100 mΩ Max.
- 4.Insulation Resistance: 1000 MΩ Min.

Environmental:

- 1.Operating Temperature: -40℃ ~ 85℃.

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS
MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	10/18/24	FINISH		MODLE	SIM CARD CONNECTOR 6PIN 掀盖式
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	SIM-8006F216000-S267
Jacky Chen	10/18/24	SHEET NO.	1 of 1	PART NO.	SIM-8006F216000-S267
APPROVED BY:	DATE				
Tony Kao	10/18/24				

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新圖面	Jack	101824
2	更新尺寸及更新為A0版	Jack	013118
1	更新圖面	Jack	012418