


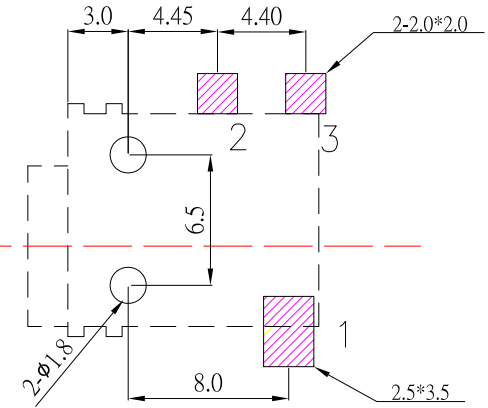

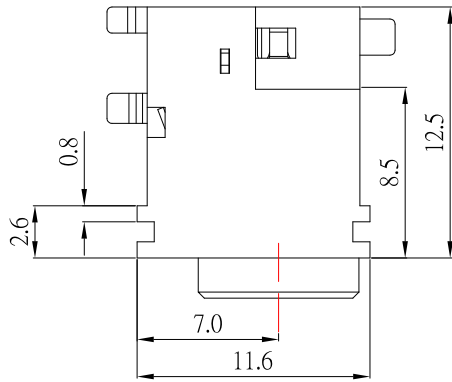
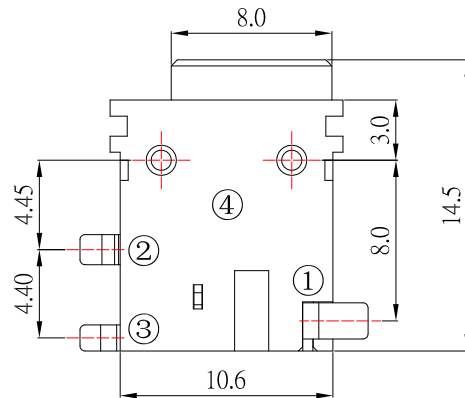
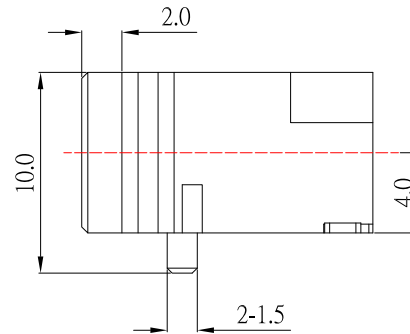




P.C.B LAYOUT
TOP VIEW

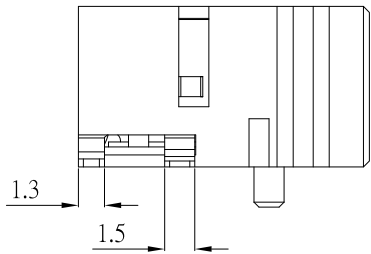

ELECTRICAL SCHEMATIC



SPECIFICATION

- 1.Rating : DC 20V , 4.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

4	HOUSING	1	PA9T (BLACK)	
3	SPRING SHUNT	1	BRASS	Ag-Plating
2	CONTACT PIN	1	PBS	Ag-Plating
1	PIN TERMINAL	1	BRASS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	09/05/18	FINISH	MODLE	DC JACK SMT TYPE
CHECKED BY:	DATE	SCALE	DWG NO.	DC-S800-1.2-S214
Jacky Chen	09/05/18	1 : 1	PART NO.	DC-S800-1.2-S214
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	09/05/18			