

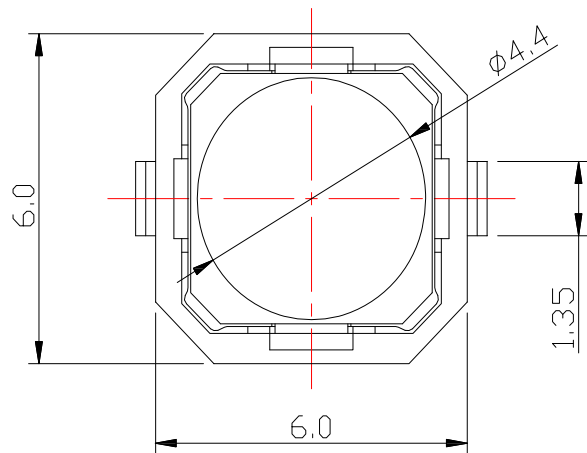
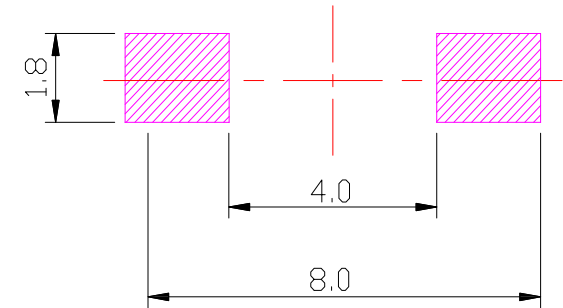


CIRCUIT DIAGRAM



P.C.B LAYOUT MOUNTING PATTERN

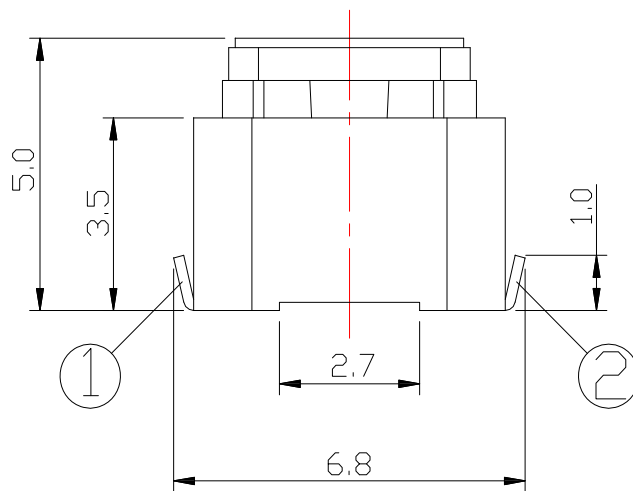

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	100 mΩ Max.		
Travel	1.30± 0.1 mm		
Operating Force	3	250 ± 50gf	4 320 ± 50gf
Operating Life (cycles)	100,000		80,000

				DRAWN BY: Jack Lu				DATE	12/31/25	MAT'L		TITLE	SWITCH	
				CHECKED BY: Jacky Chen				DATE	12/31/25	FINISH		MODLE	TACT SWITCH	
				APPROVED BY: Tony Kao				DATE	12/31/25	SCALE	1 : 1	DWG NO.	TS-A32USA-x-S138	SIZE
										SHEET NO.	1 of 1	PART NO.	TS-A32USA-x-S138	VER
														R2
2	更新Operating Force选项			Jack	123125									
1	新增Operating Force:320 ± 50gf			Jack	092618									
ITEM NO.	DESCRIPTION			DRAWN	DATE									

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S

UNITS

MM