






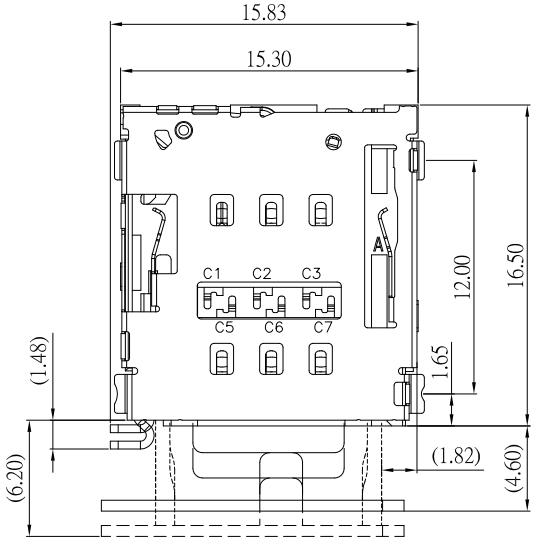



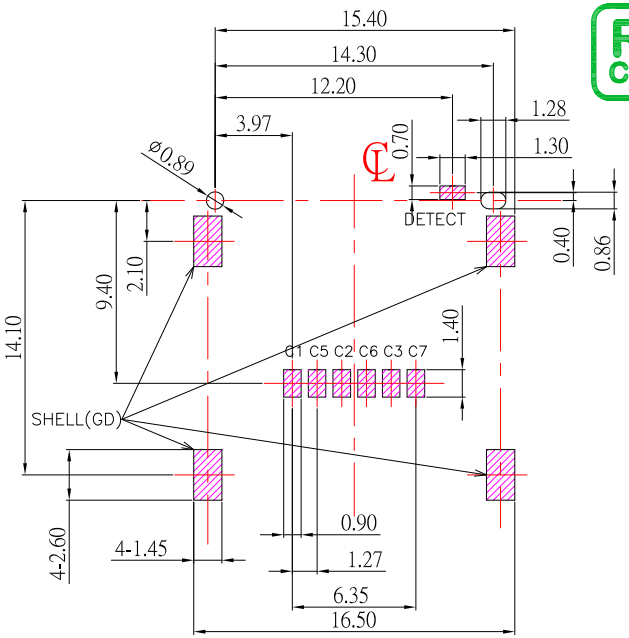

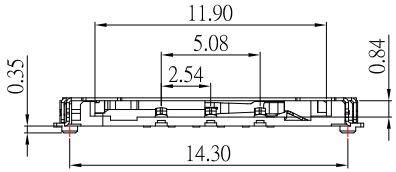

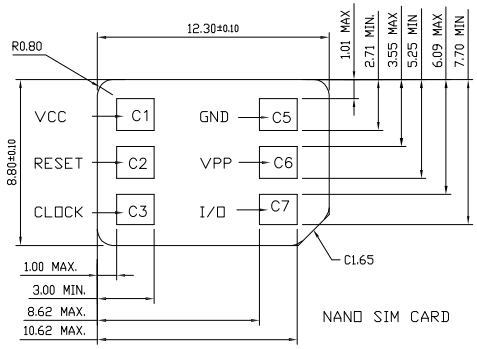

PCB LAYOYT

SPECIFICATION

Electrical :

1. Rating: 0.5A , 50V
2. Contact Resistance: 100 mΩ Max.
3. Insulation Resistance: 1000 MΩ Min.
4. Dielectrec Withstanding Voltage: 250 V AC

Material:

1. Housing: LCP , Black
2. Contact: Phosphor Bronze
3. Shell: SUS

Finish:

1. Contact: Plated Gold in Mating Area ;
   Gold Plated on Solder Balls ;
   Nickel under plated overall
2. Shell: Nickel under Plated surface layer

ITEM NO.	DESCRIPTION	DRAWN	DATE
10	新增尺寸	Jack	081123
9	更新料號	Jack	060923
8	新增尺寸	Jack	032123
7	更新尺寸	Jack	031523
6	更新圖面	Jack	070822
5	新增材質標示	Jack	041521
4	新增PCB LAYOUT外型框	Jack	033021
3	更新圖面尺寸及新增尺寸	Jack	032921
2	新增PCB LAYOUT標示PIN名稱	Jack	032621
1	新增卡托位置	Jack	082318

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 08/11/23	MATERIAL	
CHECKED BY: Jacky Chen	DATE 08/11/23	FINISH	
APPROVED BY: Tony Kao	DATE 08/11/23	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	CONNECTOR		
MODLE	NANO SIM卡托款帶開關 帶偵測PIN		
DWG NO.	NSIM-060562-S267	SIZE	A4
PART NO.	NSIM-060562-S267	VER	R10