

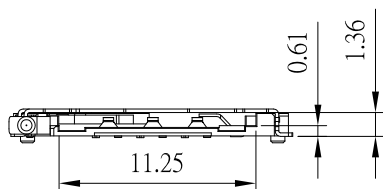


PCB LAYOYT

C1:Supply Voltage Vcc
C2:Reset(RST)
C3:Clock(CLK)
C4:V/I/O
C5:Ground
C6:Programming Voltage Vpp
C7:V/I/O



Circuit Diagram For Switch

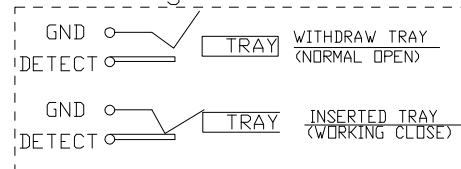

SPECIFICATION

Electrical :

1. Rating: 1.0mA , 30V DC
- 2.Contact Resistance: 30 mΩ Max.
- 3.Insulation Resistance: 100 MΩ Min.
- 4.Dielectrec Withstanding Voltage: 500 V AC

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 08/23/18
DATE: 08/23/18
DATE: 08/23/18

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	NANO SIM卡托款帶開關
SCALE	1 : 1	DWG NO.	NSIM-0605IP62-S267
SHEET NO.	1 of 1	PART NO.	NSIM-0605IP62-S267
		SIZE	A4
		VER	R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增卡托位置	Jack	082318