

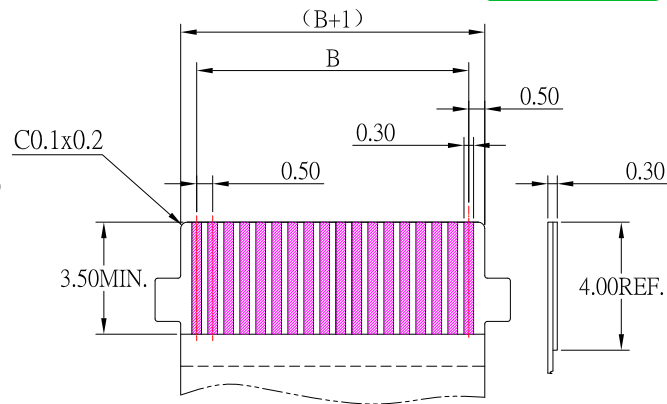
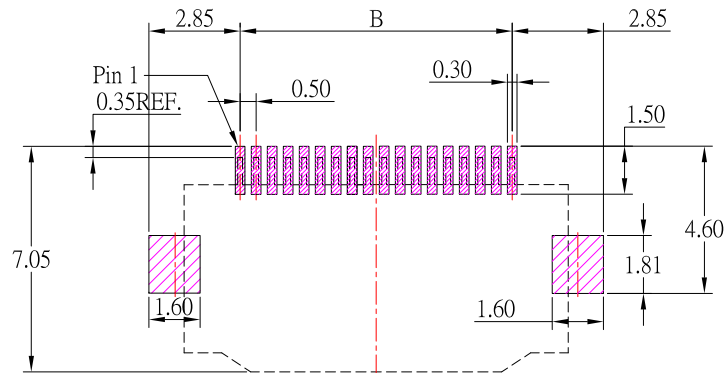
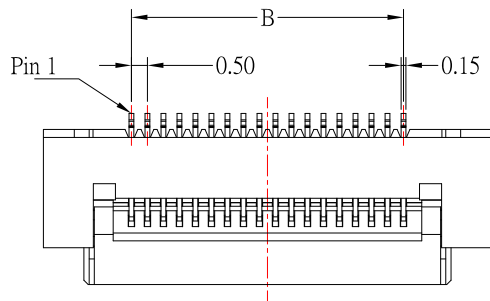



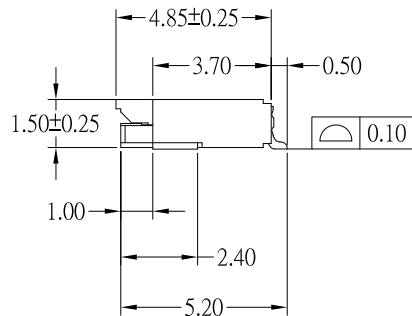

PCB LAYOUT

APPLICABLE FPC/FFC

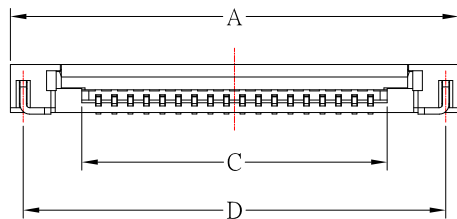

NOTES:

1. MATERIAL:

- 1.1 HOUSING: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:NATURE
- 1.2 COVER: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:BLACK
- 1.3 CONTACT: PHOSPHOR BRONZE
- 1.4 LEG: BRASS

2. PLATING:

- 2.1 CONTACT: TIN PLATED ON NICKEL OVERALL
- 2.2 LEG: TIN PLATED ON NICKEL OVERALL

3. RATING:

- 3.1 CURRENT RATING: 0.5A AC/DC
- 3.2 VOLTAGE RATING: 25V AC/DC
- 3.3 TEMPERATURE RANGE: -25°C~+85°C

Number of Contacts	Dimension			
	A	B	C	D
18	14.00	8.50	9.54	13.20
24	17.00	11.50	11.04	16.20



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/23/17
DATE: 10/23/17
DATE: 10/23/17

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: CONNECTOR
MODLE: FPC 0.5mm 掀蓋式 蝴蝶扣
DWG NO. FPC05L-15xx-B1-S304
PART NO. FPC05L-15xx-B1-S304

SIZE: A4
VER: R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新PIN腳項	Jack	102317
1	新增插入深度尺寸	Jack	081117