

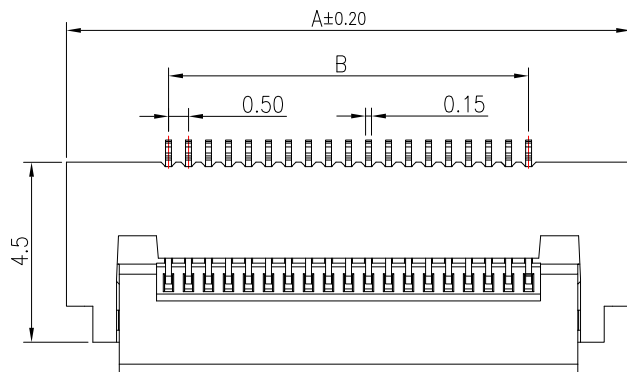
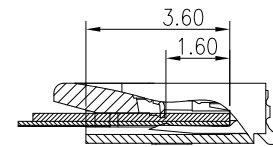

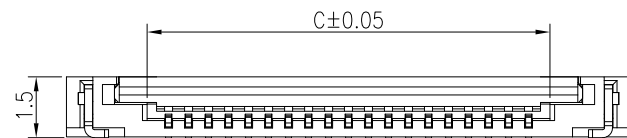


COVER OPEN STATE




CABLE INSERT DIM.

PIN数	A	B	C
12	10.60	5.50	6.58
15	12.10	7.00	8.07
20	14.60	9.50	10.57
24	16.60	11.50	12.57
26	17.60	12.50	13.57

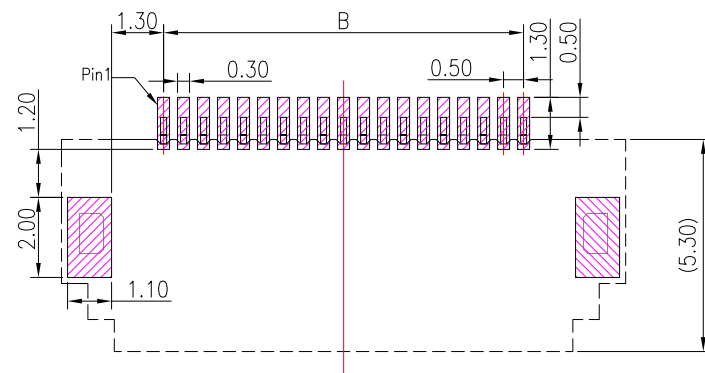

PCB LAYOUT

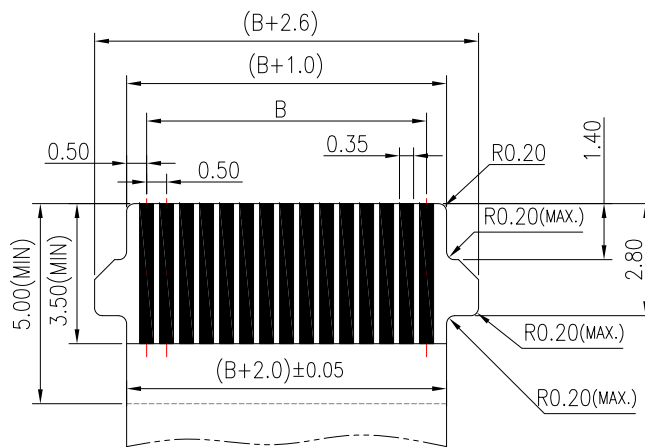

APPLICABLE FPC/FFC

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: HIGHT-TEMP PLASTIC,COLOR:BEIGE
 - 1.2 ACTUATOR: HIGHT-TEMP PLASTIC,COLOR:BLACK
 - 1.3 CONTACT: COPPER ALLOY
 - 1.4 FITTING NAIL: COPPER ALLOY
2. PLATING:
 - 2.1 CONTACT: GOLD / TIN PLATED ON NICKEL OVERALL
 - 2.2 LEG: TIN PLATED ON NICKEL OVERALL

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/15/21
DATE: 09/15/21
DATE: 09/15/21

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: CONNECTOR
MODLE: FPC 0.5mm 掀蓋式 蝴蝶扣
DWG NO. FPC05L-15xx-B2-S304
PART NO. FPC05L-15xx-B2-S304

SIZE: A4
VER: R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增PIN數選項	Jack	091521