





TS-H5-xx-Sx-S065

COLOR OF LED






0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

CAP Color

0	Without	1	Red
2	Green	3	Yellow
4	Ivory	5	Gray
6	Black	8	White

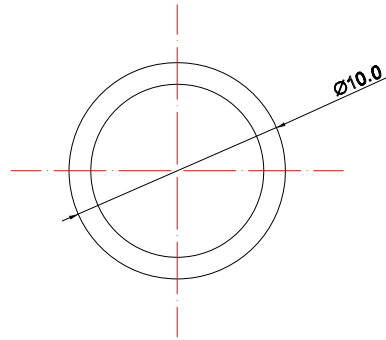

P.C.B LAYOUT

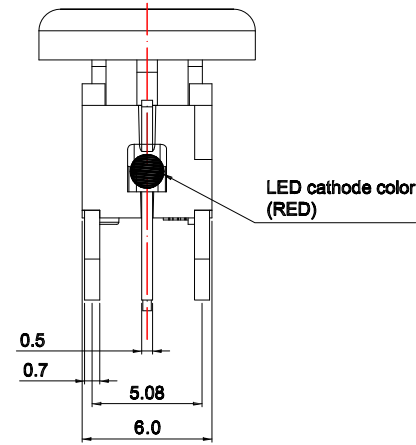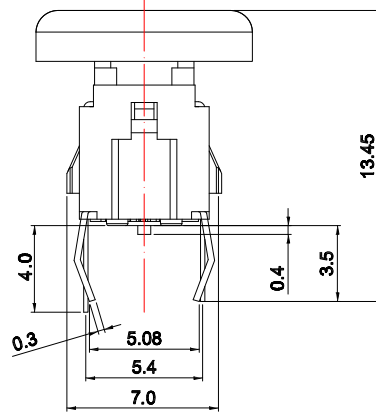

SCHEMATIC

SPECIFICATIONS

Rating	DC 12V, 50mA
Contact Resistance	100 mΩ Max.
Insulation Resistance	100 MΩ Min.
Operating Temperature	-40°C ~ +85°C
Operating Force	180 ± 50gf
Operating Life (cycles)	500,000

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	07/02/19			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH W/I LED
Jacky Chen	07/02/19			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-H5-xx-Sx-S065
Tony Kao	07/02/19	1 : 1		
		SHEET NO.	PART NO.	TS-H5-xx-Sx-S065
				SIZE A4
				VER R1