


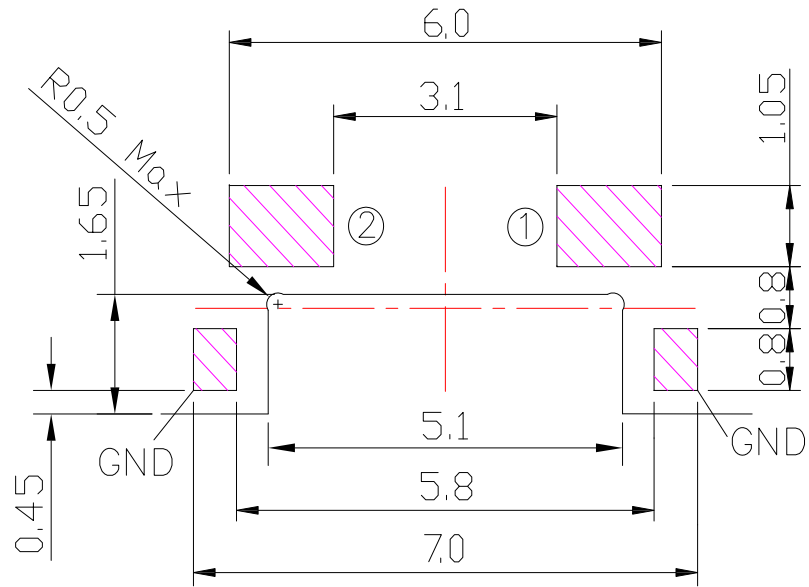
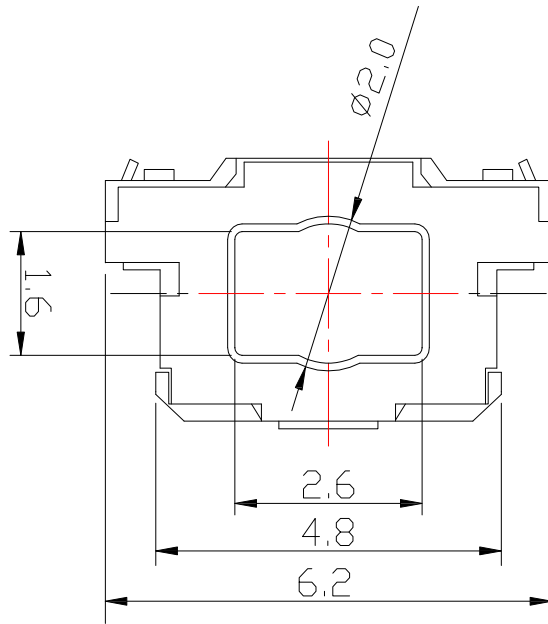


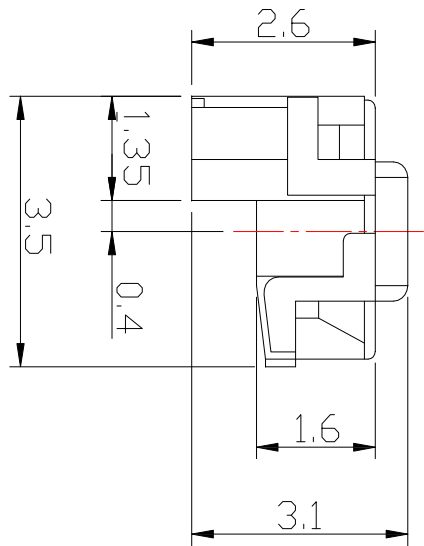

P.C.B LAYOUT



CIRCUIT DIAGRAM

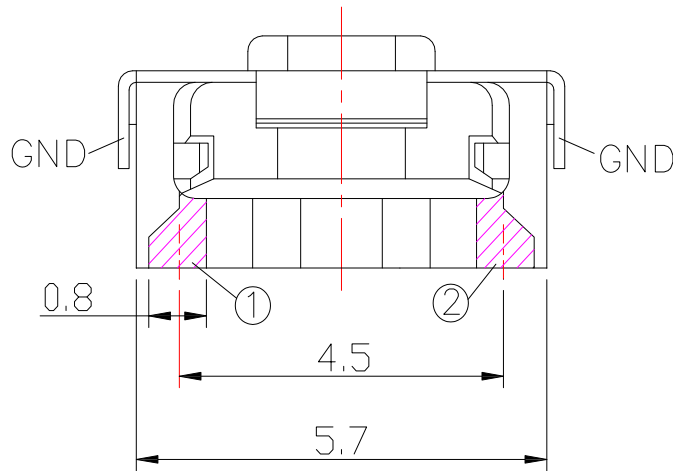

SPECIFICATIONS

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Insulation Resistance	100MΩ Min		
Travel	0.25±0.1mm		
Operating Force	2	160 ± 50gf	3 250 ± 50gf
Operating Life (cycles)	100,000		
Operating Temperature Range	-20° ~ +70° C		
Storage Temperature Range	-40° ~ +85° C		

3	更新PCB LAYOUT	Jack	120715
2	新增PIN標示	Jack	110215
1	更新SPEC	Jack	040914
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	Jack Lu	DATE	12/07/15	MAT'L		TITLE	SWITCH
CHECKED BY:	Jacky Chen	DATE	12/07/15	FINISH		MODLE	TACT SWITCH
APPROVED BY:	Tony Kao	DATE	12/07/15	SCALE	1 : 1	DWG NO.	TS-A34-x-S138
				SHEET NO.	1 of 1	PART NO.	TS-A34-x-S138
							SIZE A4
							VER R3