




IPX8

SUA-WP110H53-x-S165

Insulation Housin Color :

Black: B

White : W

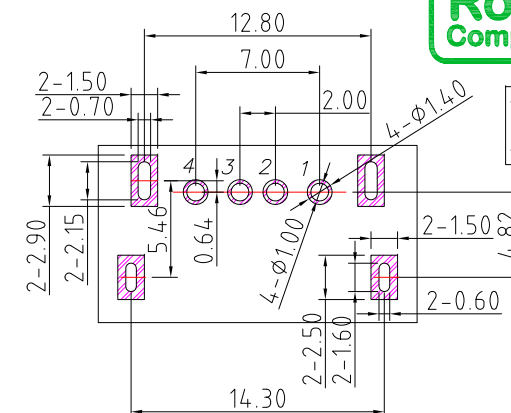

PCB LAYOUT

PIN ASSIGNMENT

PIN NO.	1	2	3	4
SINGAL NAME	VBUS	D-	D+	GND

SPECIFICATIONS

Electrical:

1.Rating: 3.0A

1.Contact Resistance: 40 mΩ Max

2.Insulation Resistance: 100 MΩ Min

3.Dielectric Withstanding Voltage: 100V AC

Material:

1.Insulation Housing: PA10T

2.Contact: Brass






3.Shell: SUS

Finish:

1.Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls

Nickel under plated overall

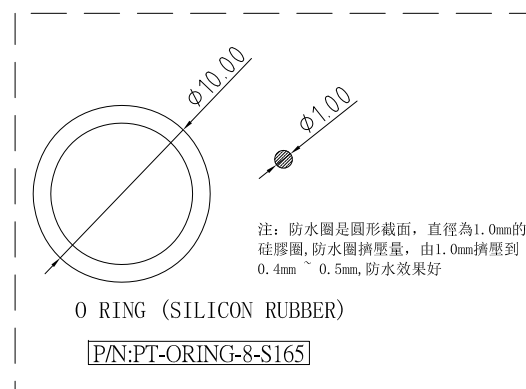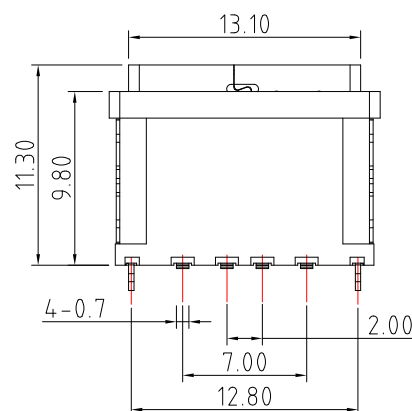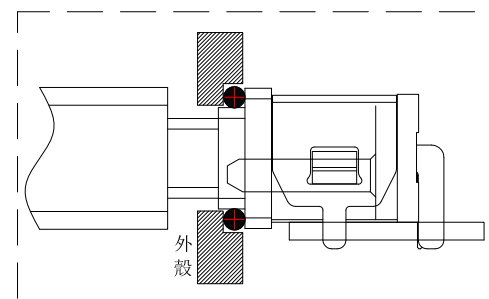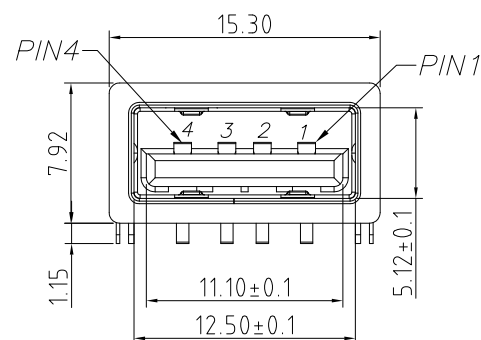

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

07/31/20

CHECKED BY:

Jacky Chen

DATE

07/31/20

APPROVED BY:

Tony Kao

DATE

07/31/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB 2.0 AF RA WATERPROOF

SUA-WP110H53-x-S165

SUA-WP110H53-x-S165

SIZE

A4

VER

R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增PCB LAYOUT尺寸	Jack	073120