


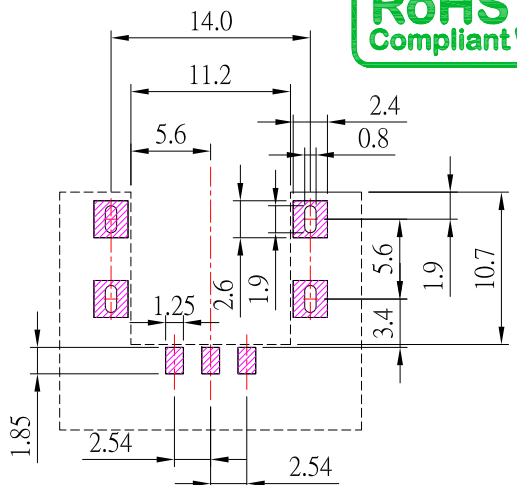
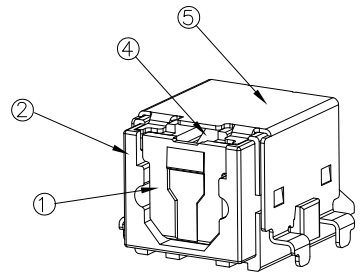
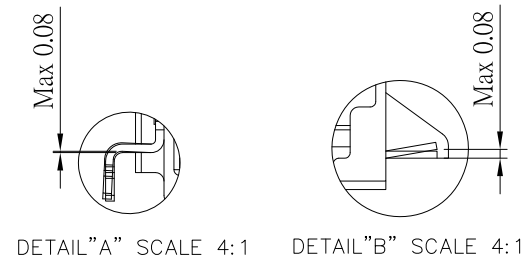


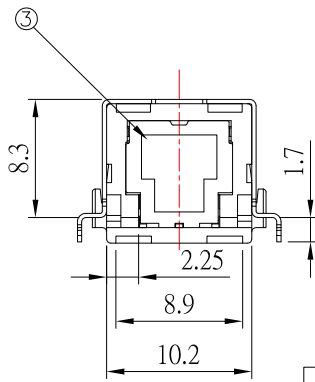


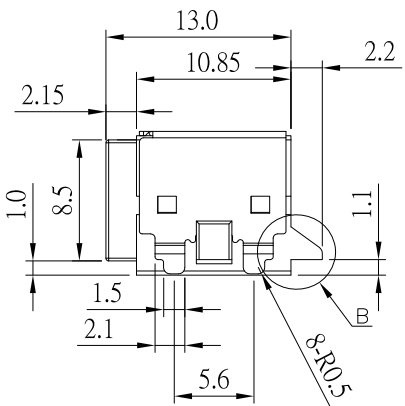

PCB LAYOUT
BOTTOM VIEW

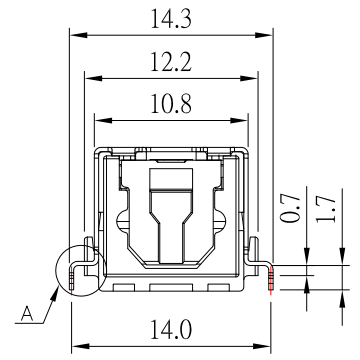

TX



RX

DATE CODE:
YYMMDD
YY: YEAR(10~)
MM: MONTH(01~12)
DD: DATE(01~31)

TRANSMITTER
PIN CONFIG

- ① VIN
- ② VCC
- ③ GND

OJ-421F07AXX_x-S214

TX	1	16 Mbps
RX	2	25 Mbps

⑥	DRIVE IC(TX UNIT)			1	25 Mbps
⑤	SHELL	SPCC	Tin	1	
④	SPRING	SUS		1	
③	COVER	LCP		1	Black
②	HOUSING	LCP		1	Black
①	GATE	PA66		1	Black
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/14/20			
CHECKED BY:	DATE	FINISH	MODLE	OPTICAL JACK
Jacky Chen	04/14/20			
APPROVED BY:	DATE	SCALE	DWG NO.	OJ-421F07AXX _x -S214
Tony Kao	04/14/20	1 : 1	PART NO.	OJ-421F07AXX _x -S214
		SHEET NO.	1 of 1	

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新料號	Jack	041420
1	更新料號	Jack	112019