

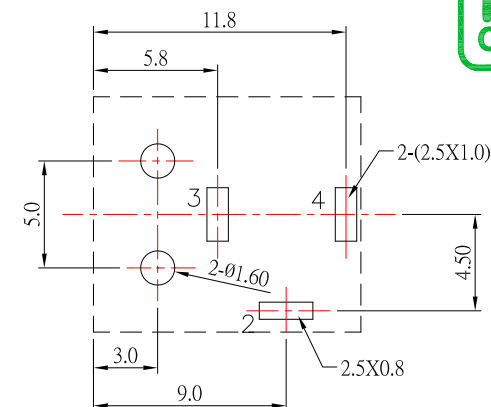
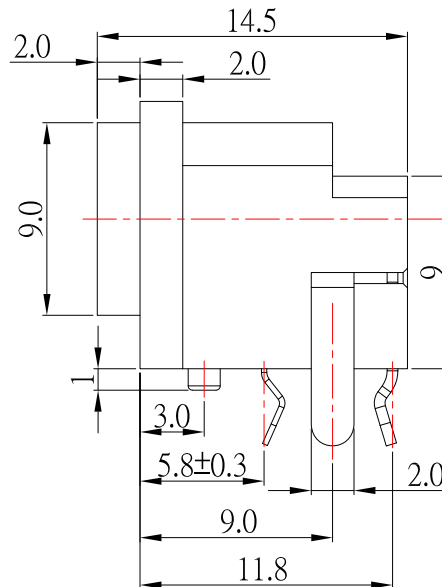
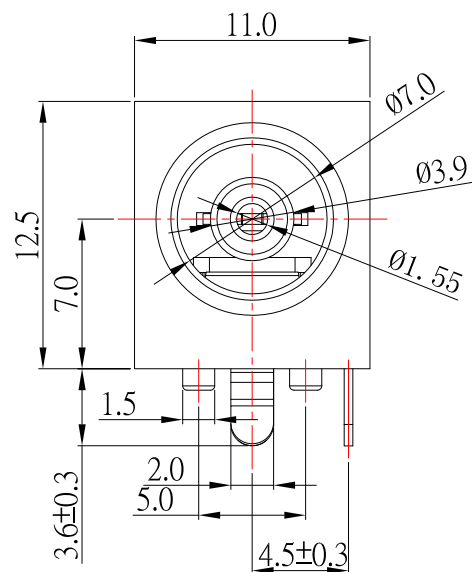
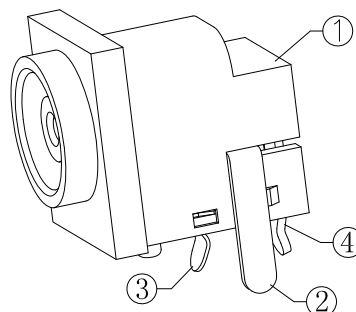


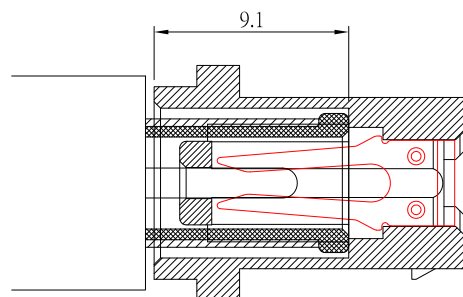


P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

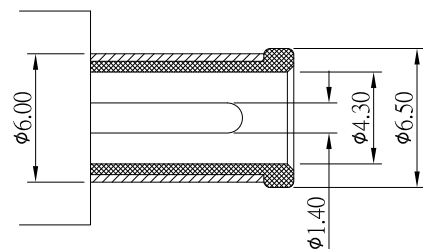

SPECIFICATION

- Rating : DC 30V 1.0A
- Contact resistance : $\leq 50\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles °

MODEL NO.	DC-049-2-1.4-S124
SCHEMATIC	

4	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
2	CURVE PIECE	1	BRASS	Ag-Plating
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/02/16
DATE: 11/02/16
DATE: 11/02/16

MAT'L		TITLE	JACK
FINISH		MODLE	DC JACK
SCALE	1 : 1	DWG NO.	DC-049-2-1.4-S124
SHEET NO.	1 of 1	PART NO.	DC-049-2-1.4-S124
		SIZE	A4
		VER	R

2	更新SPEC和材質及更新為AO版	Jack	012716
1	更新SPEC及材質	Jack	012115
ITEM NO.	DESCRIPTION	DRAWN	DATE