

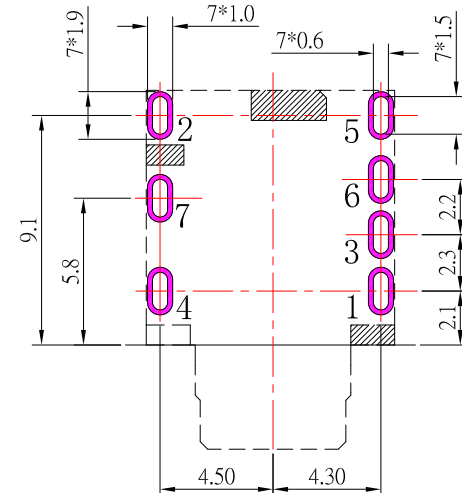
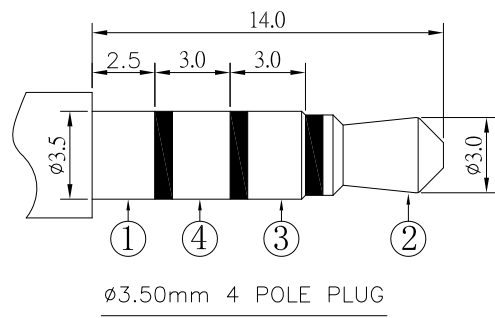
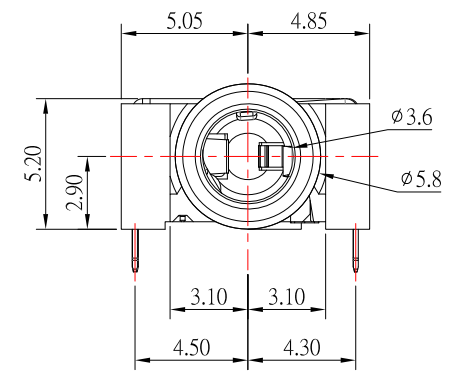
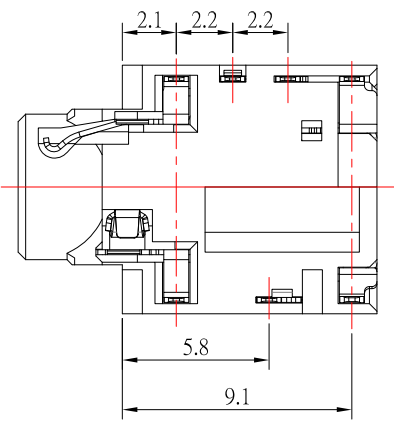
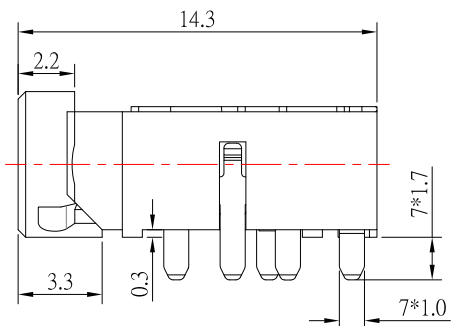


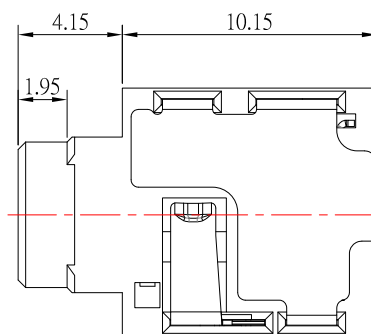

P.C.B LAYOUT
TOP VIEW

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

9	HOUSING	1	PA9T	
8	INSULATOR	1	PA9T	
7	SHELL	1	SUS	Ni-Plating
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
No	PART NAME	QTY	MATERIAL	REMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/10/20		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	08/10/20		DWG NO.	PJ-D3151-S124
APPROVED BY:	DATE	SHEET NO.	PART NO.	PJ-D3151-S124
Tony Kao	08/10/20	1 of 1		