


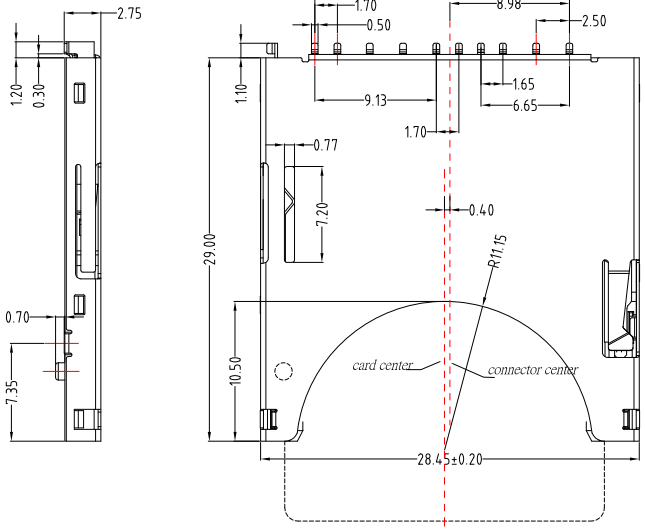


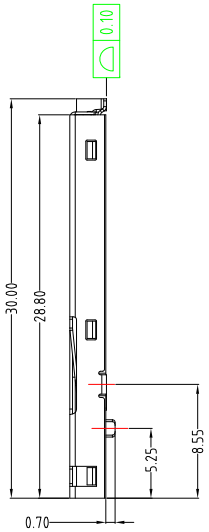

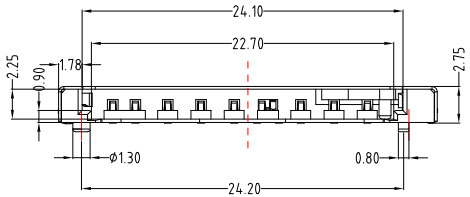

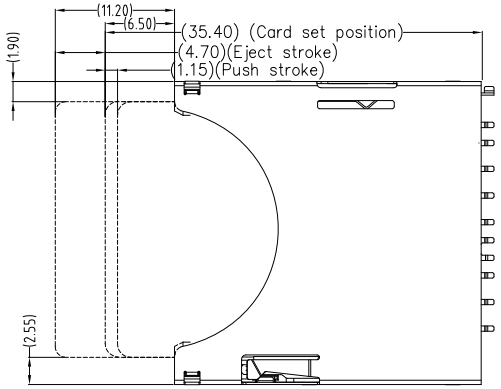

Pin No.		SD	MMC
P1	MMC-DAT SD-DAT3	1P	7P
P2	MMC-CMD SD-CMD	2P	2P
P3	MMC-VSS1 SD-VSS1 接地	3P	3P
P4	MMC-VDD SD-VDD	4P	4P
P5	MMC-CLK SD-CLK	5P	5P
P6	MMC-VSS2 SD-VSS2 接地	6P	6P
P7	MMC-DAT SD-DAT0	7P	1P
P8	SD-DAT1	8P	
P9	SD-DAT2	9P	

SPECIFICATION

Electrical :

1.Current Rating: 0.5mA AC / DC Max


2.Voltage Rating: 125V AC / DC

3.Contact Resistance: 100 mΩ Max.


4.Insulation Resistance: 1,000 MΩ Min.

Environmental:


1.Operating Temperature: -20˚C ~ +90˚C.

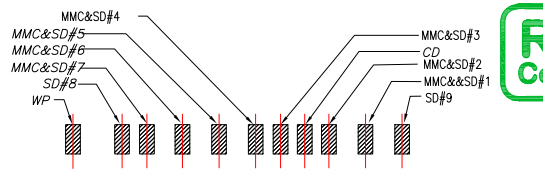

RoHS Compliant

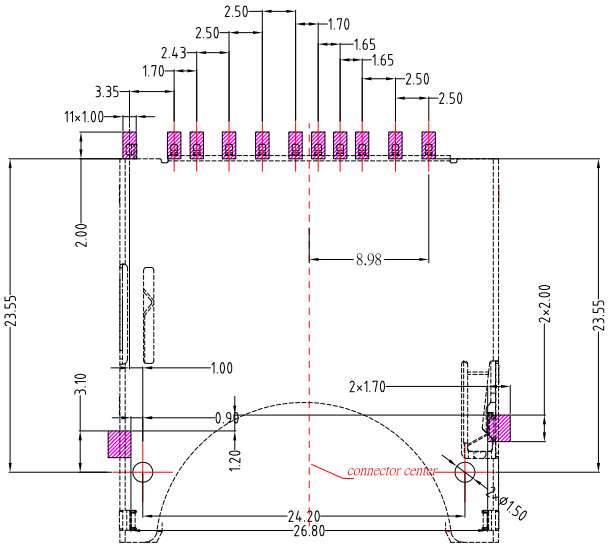

PCB LAYOUT

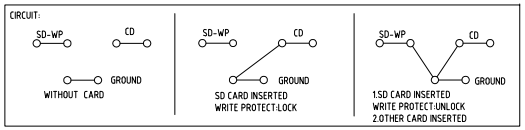

Material:

1.Housing: LCP,Black

2.Contact: Phosphor Bronze

3.Shell: SUS

Finish:

1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

2.Shell: Nickel under Plated surface layer

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新圖面	Jack	062419
1	更新圖面	Jack	081018

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3˚

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 06/24/19	MAT'L	
CHECKED BY: Jacky Chen	DATE 06/24/19	FINISH	
APPROVED BY: Tony Kao	DATE 06/24/19	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	CONNECTOR		
MODLE	CARD CONNECTOR		
DWG NO.	SD-001-001-S267	SIZE	A4
PART NO.	SD-001-001-S267	VER	R2