



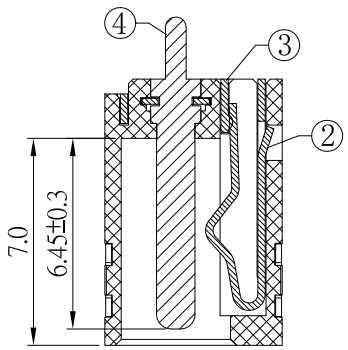


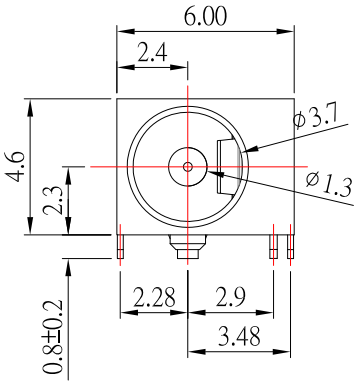


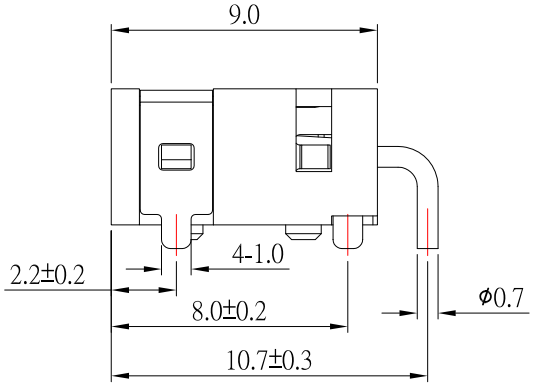

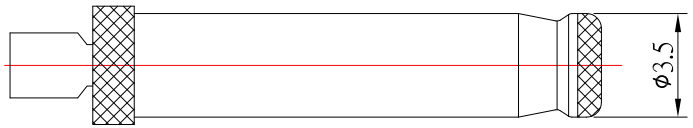

RECOMMENDED PLUG

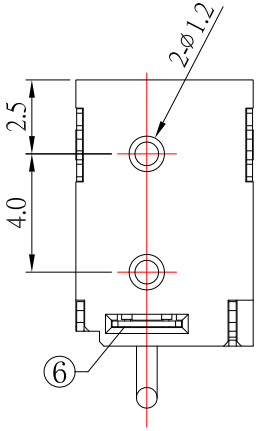

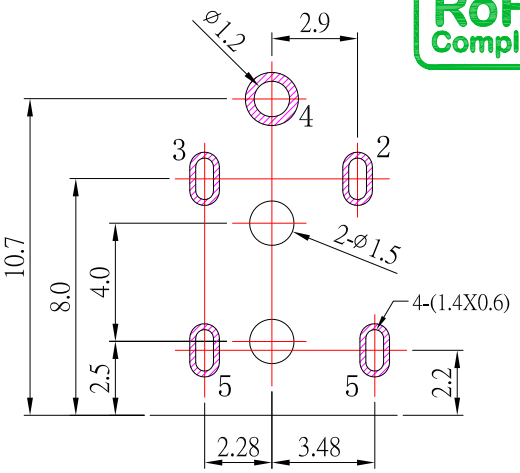

RoHS Compliant

P.C.B LAYOUT
TOP VIEW

MODEL NO.	DC-S060-1.3
SCHEMATIC	4 (+) 3 2 (–)

SPECIFICATION

1.Rating ：DC 12V, 3.0A；
2.Contact resistance：≤ 30mΩ ；
3.Insulation resistance：≥100MΩ ；
4.Withstand voltage：500VAC ；
5.Insertion and extraction force：3-20N
6.life test：5,000 cycles。

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑥	STOPPER	1	SUS	N/A
⑤	CONTACT FOOT	1	BRASS	Ag-Plating
④	PIN	1	BRASS	Ni-Plating
③	CURVE PIECE	1	BRASS	Ag-Plating
②	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
①	HOUSING	1	PA9T	

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新尺寸	Jack	071723
2	更新PCB LAYOUT尺寸	Jack	081222
1	更新圖面樣式和鍍層	Jack	121119

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 07/17/23	MAT'L	
CHECKED BY: Jacky Chen	DATE 07/17/23	FINISH	
APPROVED BY: Tony Kao	DATE 07/17/23	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	JACK		
MODLE	DC JACK		
DWG NO.	DC-S060-1.3-S124	SIZE	A4
PART NO.	DC-S060-1.3-S124	VER	R3