


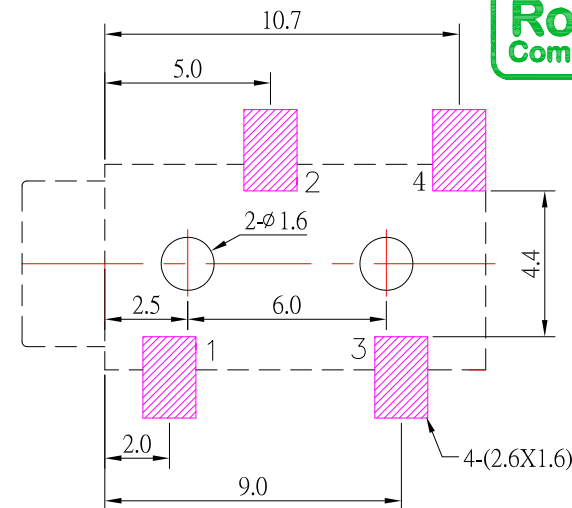
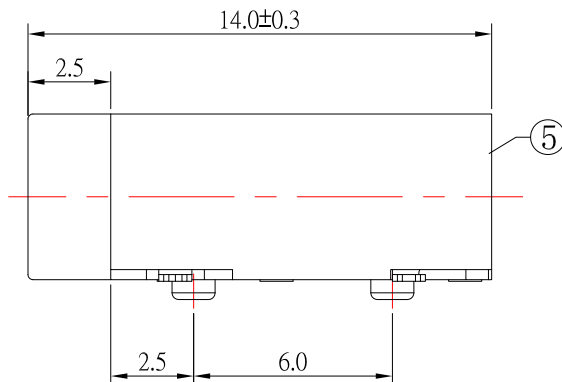
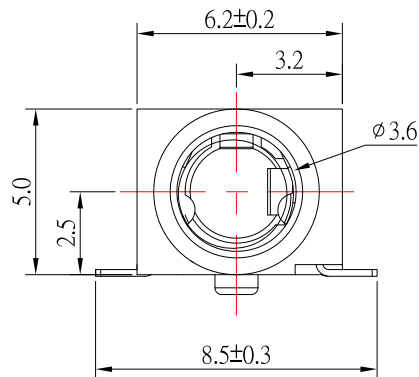


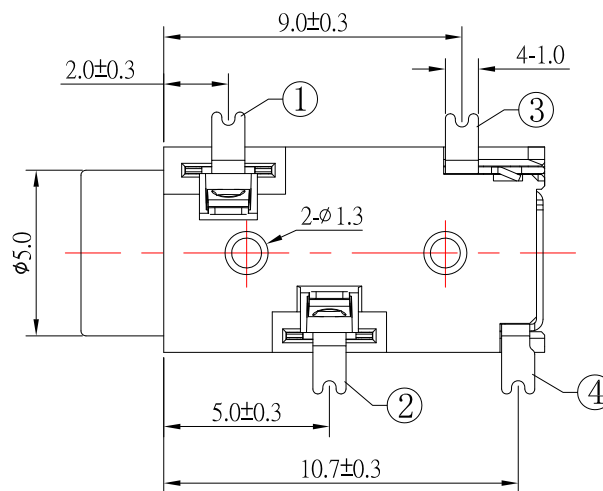

P.C.B LAYOUT
TOP VIEW

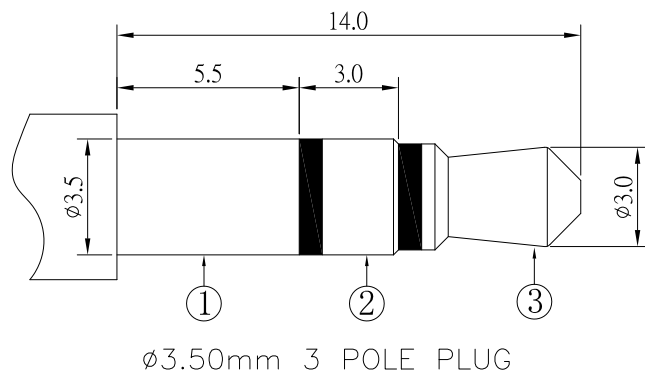

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V , 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

⑤	HOUSING	1	PA9T	
④	CURVE PIECE	1	BRASS	Sn-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
②	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
①	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
No	PART NAME	QTY	MATERIAL	REMARK

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
09/19/22
DATE
09/19/22
DATE
09/19/22

MAT'L
FINISH
SCALE
SHEET NO.

TITLE: JACK
MODLE: PHONE JACK
DWG NO.: PJ-S3127C-S124
PART NO.: PJ-S3127C-S124

SIZE: A4
VER: R1

1	更新圖面	Jack	091922
ITEM NO.	DESCRIPTION	DRAWN	DATE