




SUA-110P13Cx-x-S236

SHELL :
Blank : BRASS
I : SPCC

鍍層厚度 :
Blank : 1u"
2 : 15u"
3 : 30u"

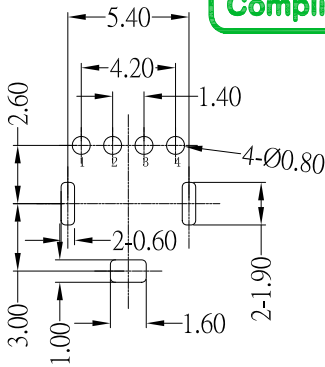

PCB LAYOUT

SPECIFICATIONS

Electrical:





- 1.Current: 30V DC , 1.5A
- 2.Dielectric Withstanding Voltage: AC 500V
- 3.Insulation Resistance: 1000 MΩ Min
- 4.Contact Resistance: 30 mΩ Max

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

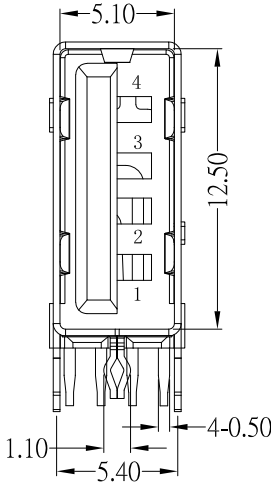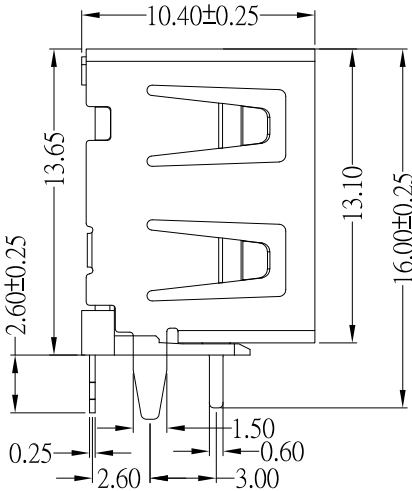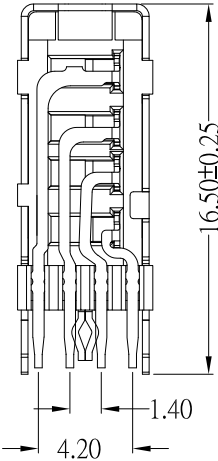

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ±0.2 ±0.3 ±0.4 ±0.5 ±0.3 3RD. ANGEL'S  UNITS MM					DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
										</					