
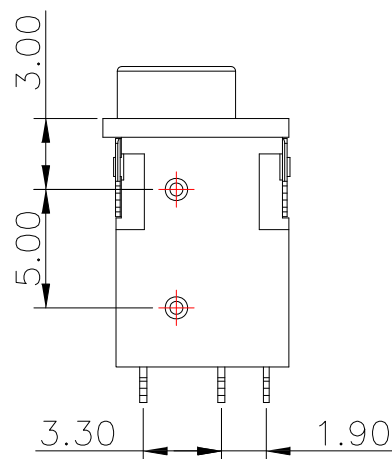
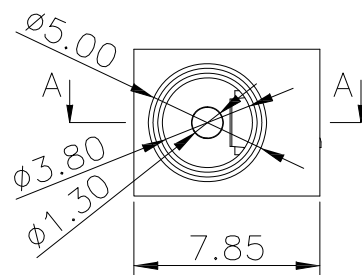
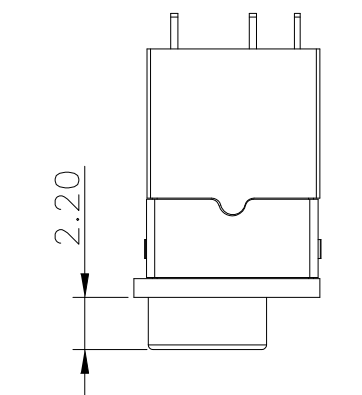
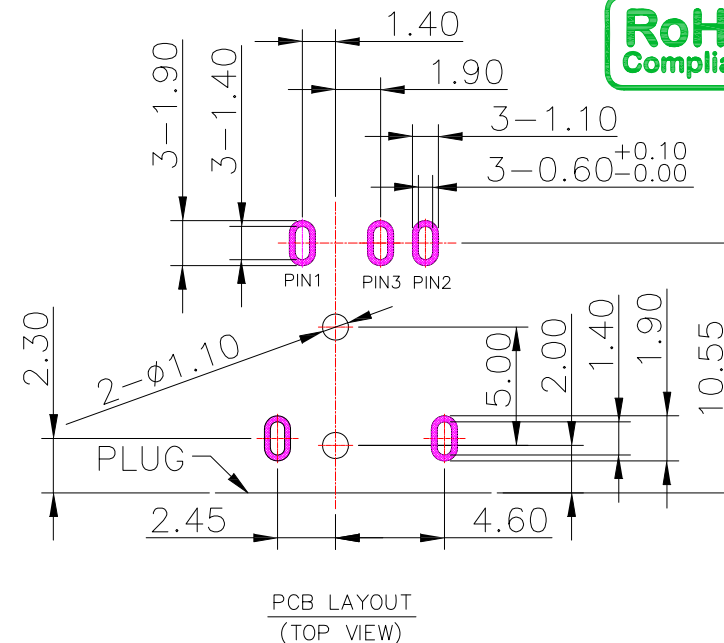


A-A

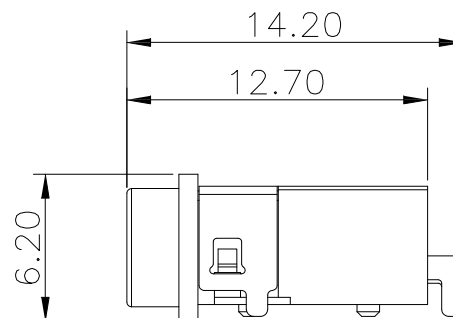


PCB LAYOUT  
(TOP VIEW)

### SPECIFICATION

- 1.Rating : DC 30V, 3.0A
- 2.Contact resistance :  $\leq 50\text{m}\Omega$
- 3.Insulation resistance :  $\geq 100\text{M}\Omega$
- 4.Dielectric Withstanding Voltage : 500V AC

### MATERIAL

HOUSING : TEMPERATURE PLASTIC  
COVER : TEMPERATURE PLASTIC  
CONTACT : COPPER ALLOY(Au Plated)



SCHEMATIC



建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5  $\pm 0.2$   
Above 5 ~ 15  $\pm 0.3$   
Above 15 ~ 30  $\pm 0.4$   
Above 30 ~ 50  $\pm 0.5$   
Angle  $\pm 0.3^\circ$

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE  
01/19/18  
DATE  
01/19/18  
DATE  
01/19/18

MAT'L  
FINISH  
SCALE  
SHEET NO.

TITLE  
MODLE  
DWG NO.  
PART NO.

JACK  
DC JACK 防水型  
DC-WP1001HS-1.3-S377  
DC-WP1001HS-1.3-S377

SIZE  
A4  
VER  
R1

| ITEM NO. | DESCRIPTION    | DRAWN | DATE   |
|----------|----------------|-------|--------|
| 1        | 新增PCB LAYOUT尺寸 | Jack  | 011918 |