

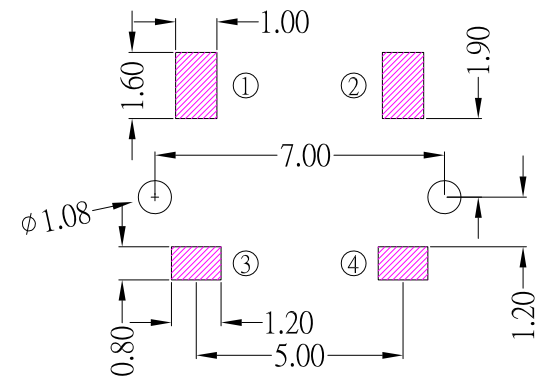
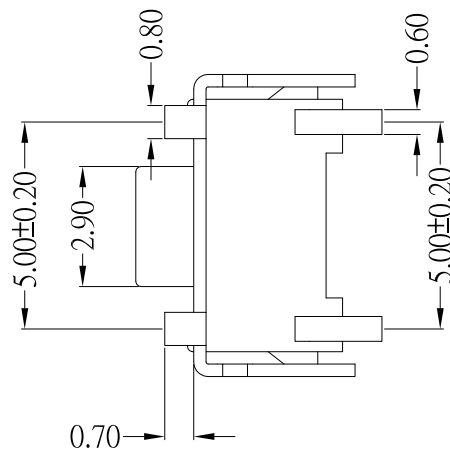



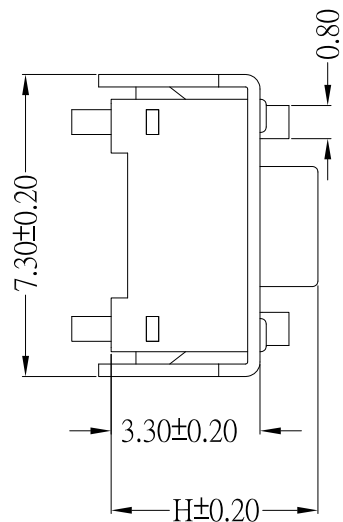

P.C.B LAYOUT MOUNTING PATTERN

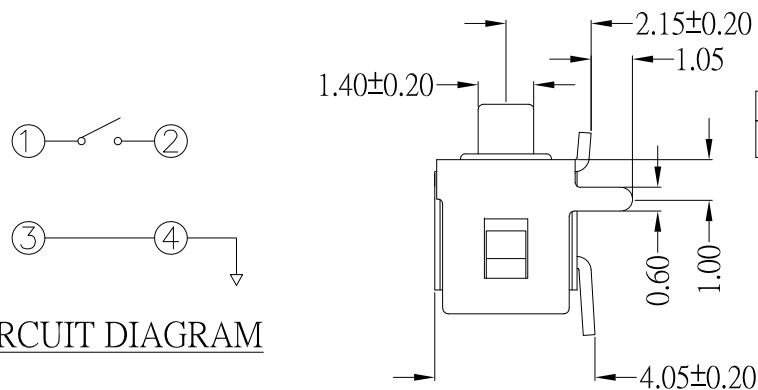

CIRCUIT DIAGRAM

TS-A01VSx-xx-S428

MODEL NO.	TS-A01VS	TS-A01VSA	TS-A01VSQ	TS-A01VSB	TS-A01VSC
H (mm)	4.30	5.00	6.00	7.00	8.00

Knob Color :

B: Black

Operating Force

SPECIFICATIONS

Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max.			
Travel	0.25 ± 0.10mm			
Operating Force	2	180±50gf	3	250±50gf
Operating Life (cycles)	50,000		30,000	

E	TERMINAL	2	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	BRASS	Tin plated
B	BASE	1	PPA (Black)	
A	STEM	1	PPA (Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	更新圖面	Jack	112621
3	更新尺寸標示位置	Jack	111621
2	更新尺寸	Jack	110321
1	更新高度選項	Jack	102921
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu 11/26/21
CHECKED BY: Jacky Chen 11/26/21
APPROVED BY: Tony Kao 11/26/21

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH
TS-A01VSx-xx-S428
TS-A01VSx-xx-S428

SIZE
A4
VER
R4