

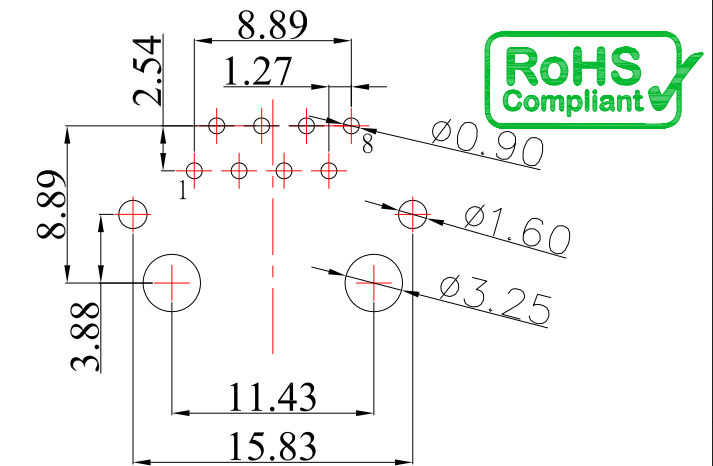
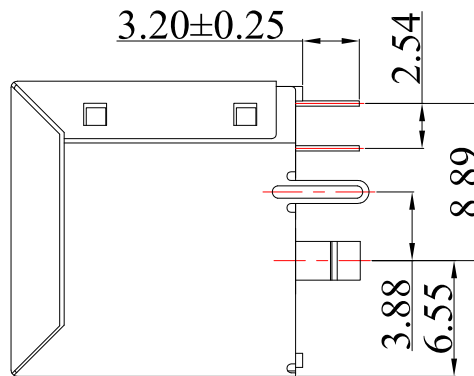


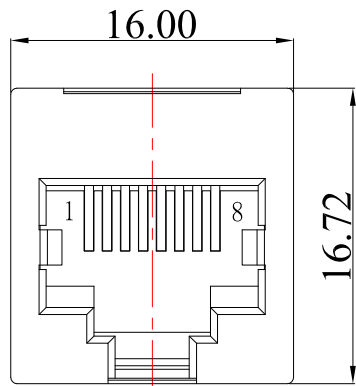

PCB LAYOUT MOUNTING PATTERN

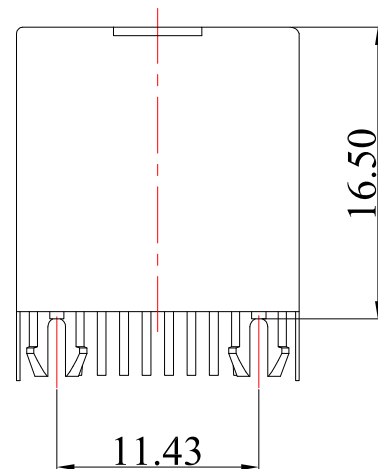

RJ45-52E811E-x-S307

鍍層厚度 :

|             |
|-------------|
| Blank : 1u" |
| 1 : 3u"     |
| 2 : 15u"    |
| 3 : 30u"    |
| 5 : 6u"     |

### SPECIFICATIONS

#### Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 500 MΩ MIN. @500 VDC
- 5.Dielectric Strength : 1000 VAC

#### Mechanical:

- 1.Housing : PBT,Black
- 2.Insert : PBT,Black
- 3.Contact : Phosphor Bronze , Gold Plating over Nickel
- 4.Shield : Brass, Nickel Plated

#### Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

**CONTACT**

建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE: 08/04/21  
DATE: 08/04/21  
DATE: 08/04/21

| MAT'L     | TITLE    | RJ45                |
|-----------|----------|---------------------|
| FINISH    | MODLE    | RJ45                |
| SCALE     | DWG NO.  | RJ45-52E811E-x-S307 |
| SHEET NO. | PART NO. | RJ45-52E811E-x-S307 |

SIZE: A4  
VER: R