


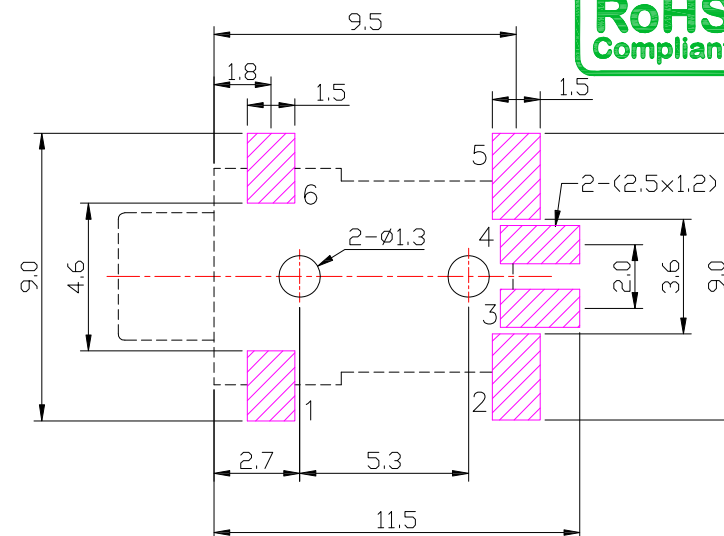
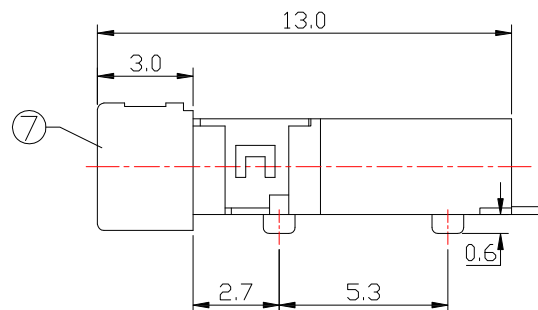


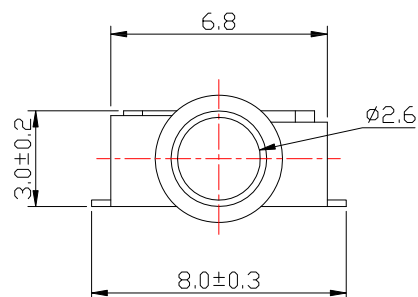


P.C.B LAYOUT
TOP VIEW

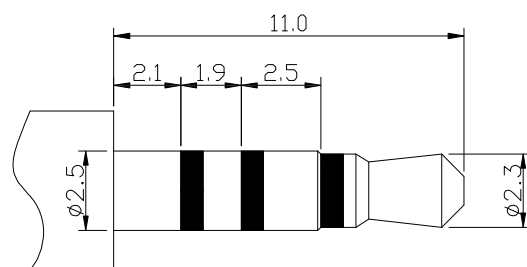

ø2.50mm 4 POLE PLUG

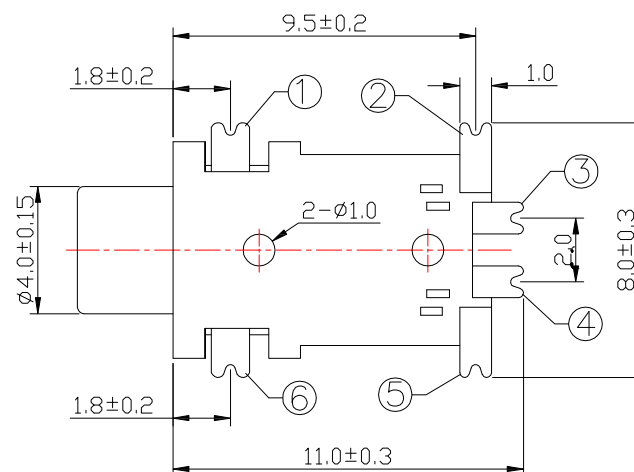

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V, 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

7	HOUSING	1	PA9T	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
4	CONTACT FOOT	1	BRASS	Ag-Plating
3	CONTACT FOOT	1	BRASS	Ag-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	07/26/19					
CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK	
Jacky Chen	07/26/19					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	PJ-S2027-S124	SIZE A4
Tony Kao	07/26/19	SHEET NO.	1 of 1	PART NO.	PJ-S2027-S124	VER R

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------