
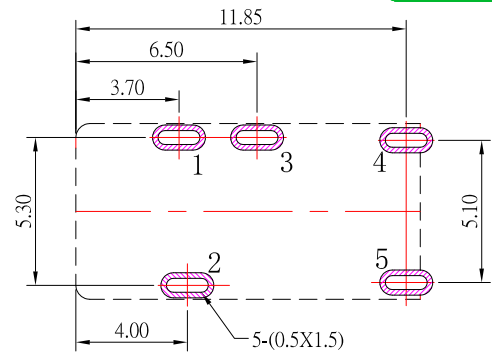
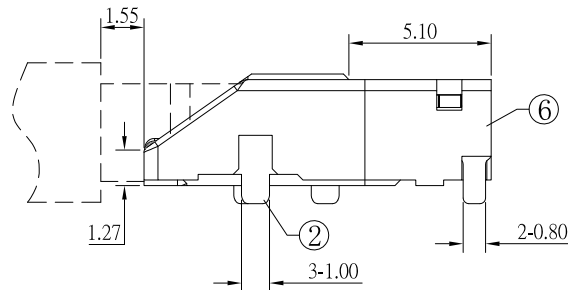
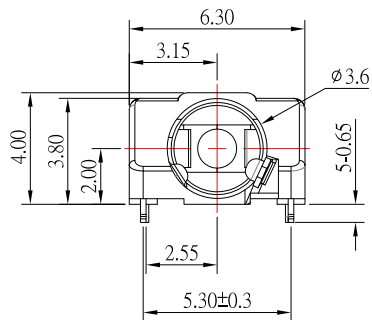




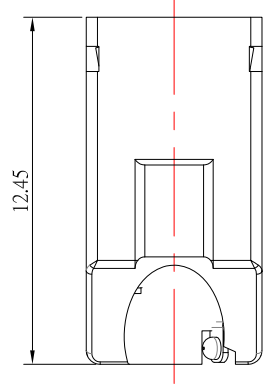


P.C.B LAYOUT TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

SCHEMATIC

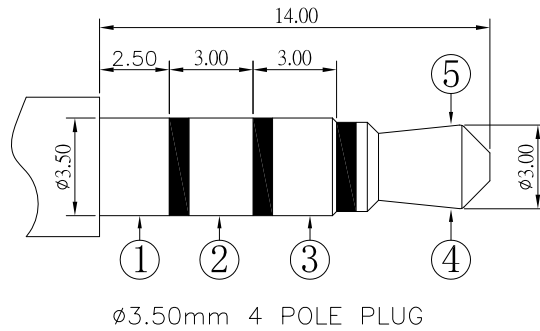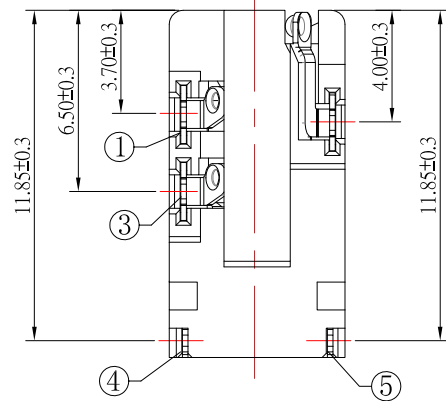

3.50mm 4 POLE PLUG

⑥	HOUSING	1	PA9T	
⑤	5# CONTACT FOOT	1	SUS	Au-Plating
④	4# CONTACT FOOT	1	SUS	Au-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
No	PART NAME	QTY	MATERIAL	REMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/08/21		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH	DWG NO.	PJ-T3523-S124
Jacky Chen	11/08/21	SCALE	1 : 1	PART NO. PJ-T3523-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	SIZE A4
Tony Kao	11/08/21			VER R1