


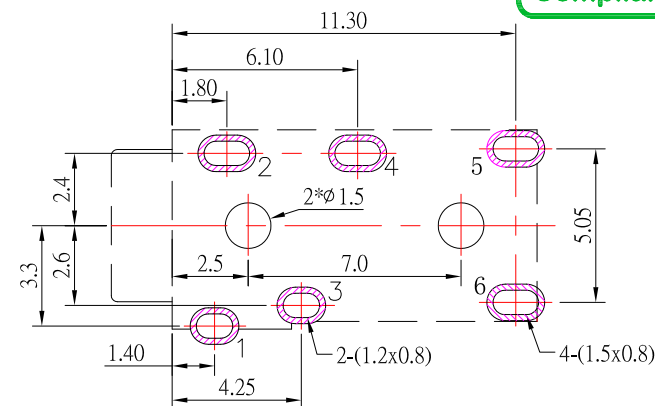
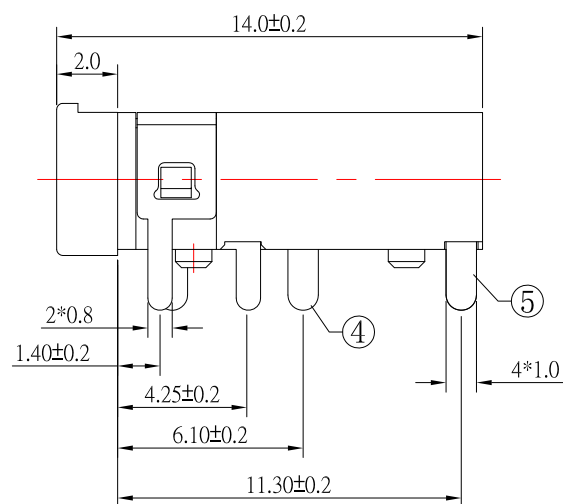


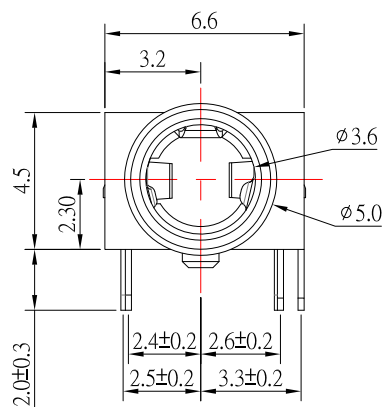


P.C.B LAYOUT
TOP VIEW

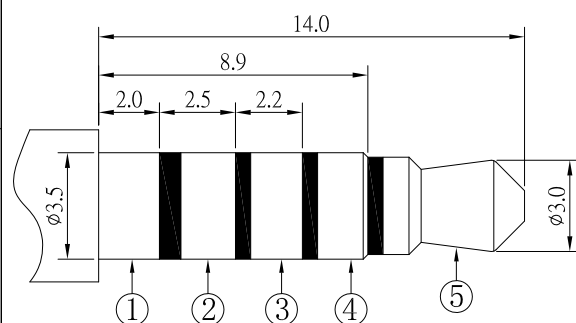

ø3.50mm 5 POLE PLUG

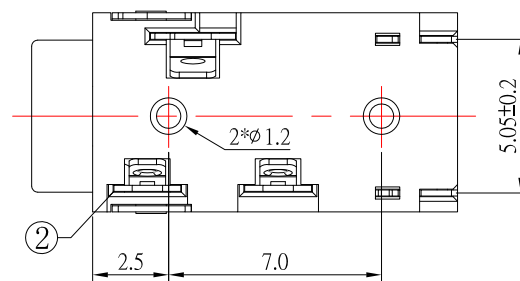

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V , 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

⑦	HOUSING	1	PA9T	
⑥	CURVE PIECE	1	BRASS	Ag-Plating
⑤	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
No	PART NAME	QTY	MATERIAL	REMARK

						建倚科技股份有限公司  CONTACT TECHNOLOGY CORP.						
						TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD. ANGEL'S		UNITS	MM
ITEM NO.	A	B	C	D	E	DESCRIPTION	DRAWN	DATE	F	G	H	I
1						更新MODLE	Jack	111621				

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	11/16/21					
CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK 5POLE	
Jacky Chen	11/16/21					
		SCALE	1 : 1	DWG NO.	PJ-D3521-S124	SIZE
APPROVED BY:	DATE					A4
Tony Kao	11/16/21	SHEET NO.	1 of 1	PART NO.	PJ-D3521-S124	VER
						R1